

▼

NA


Inop table does not apply to S-ILS 6 all Cats and S-LOC 6 Cats A and B. For inop ALS, increase S-LOC 6 Cat C/D visibility to 1 3/4 SM. Circling NA for Cat D northwest of Rwy 6-24.

MALSR

AS

MISSED APPROACH: Climb to 3000 then climbing right turn to 5000 direct PSK VORTAC and hold, continue climb-in-hold to 5000.

AWOS-3 127.375	ROANOKE APP CON 126.0 339.8	ROANOKE CLNC DEL 121.7	UNICOM 122.7 (CTAF) 0
-------------------	--------------------------------	---------------------------	--------------------------

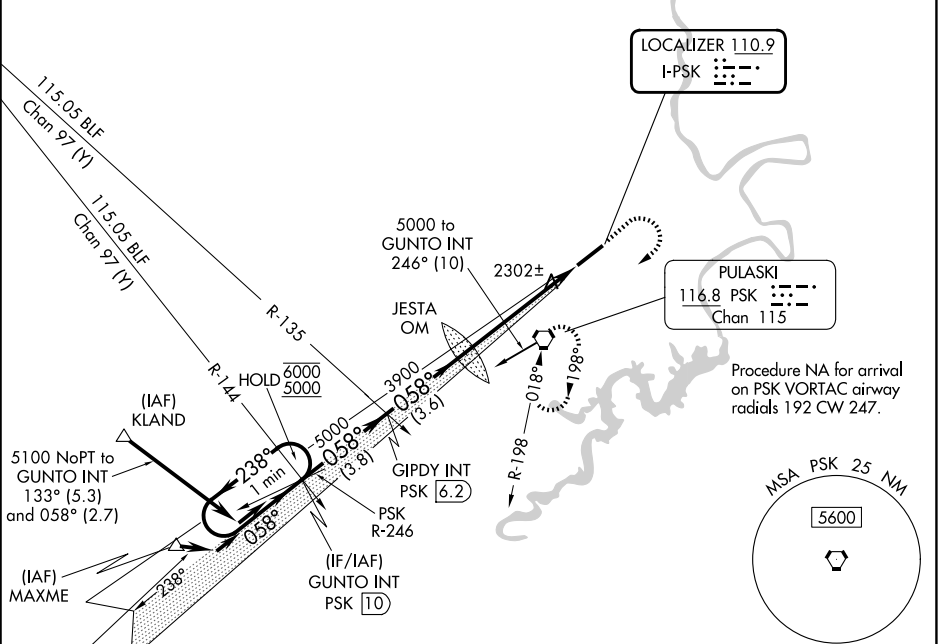

5000 NoPT

to GUNTO INT

103° (1.3)

and 058° (4.1)

One Minute Holding Pattern

3000

5000

PSK

6000

5000

GS 3.00°

TCH 58

GUNTO INT

PSK 10

GIPDY INT

PSK 6.2

JESTA OM

3823

3900

3.8 NM

3.6 NM

5.1 NM

CATEGORY

A

B

C

D

S-ILS 6

2305-1

200 (200-1)

S-LOC 6

2560-1

455 (500-1)

CIRCLING

2620-1

2680-1

2780-2

2780-2¼

515 (600-1)

575 (600-1)

675 (700-2)

675 (700-2¼)

ELEV 2105

TDZE 2105

6201 X 150

0.5% UP

058°

HIRL Rwy 6-24

REIL Rwy 24

FAF to MAP 5.1 NM

Knots

60

90

120

150

180

Min:Sec

5:06

3:24

2:33

2:02

1:42