

WAAS
CH **93711**
W36A

APP CRS
002°

Rwy Ldg **6161**
TDZE **1351**
Apt Elev **1365**

RNAV (GPS) RWY 36

BOONE COUNTY (HRO)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 46°C (114°F). DME/DME RNP-0.3 NA. VDP and Baro-VNAV NA when using Mountain Home altimeter setting. When local altimeter setting not received, use Mountain Home altimeter setting and increase all DA 139 feet and all MDA 140 feet, increase LPV all Cats and LNAV and Circling Cat C and D visibility ¼ mile, increase LNAV/VNAV all Cats visibility ½ mile. For inoperative MALSR when using Mountain Home altimeter setting, increase LPV all Cats visibility to 1¼.


MALSR

MISSED APPROACH: Climb to 3200 direct ADOKE and hold.

ASOS
121.125

MEMPHIS CENTER
126.85 281.55

UNICOM
123.0 (CTAF) 0

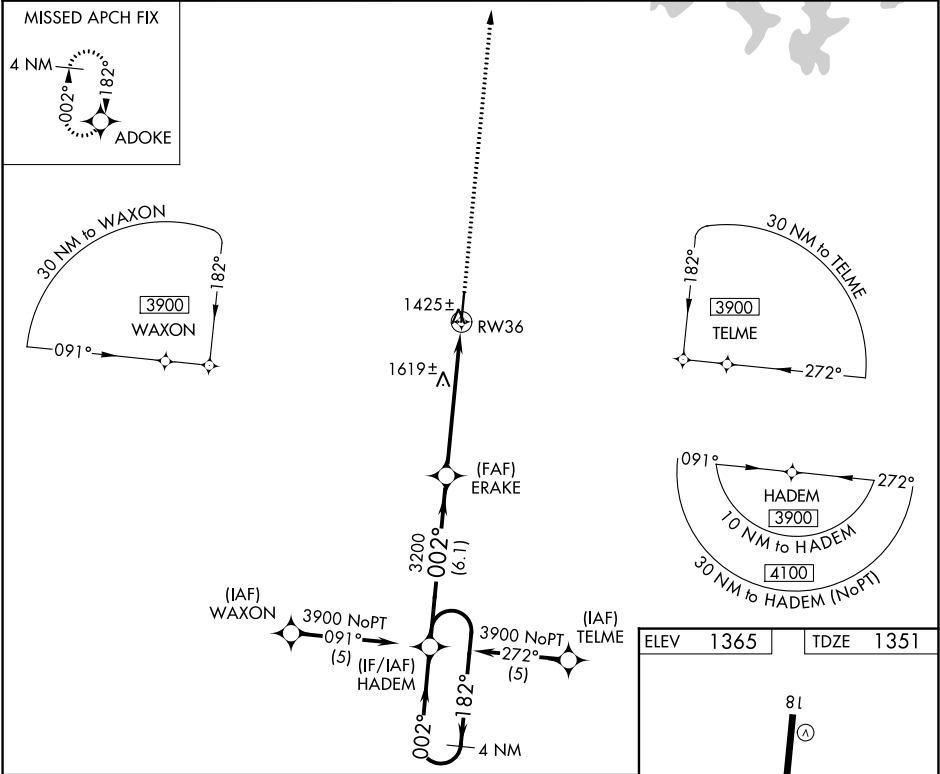

4 NM Holding Pattern
3900
GP 3.00° TCH 52
182° 002°

HADEM

ERAKE

3200
002°

*1.5 NM to RW36
RW36
*LNAV only.

6.1 NM 4.1 NM 1.5 NM

ELEV 1365

TDZE 1351

81
6161 x 150
36
002°
HIRL Rwy 18-36 0
REIL Rwy 18 0

CATEGORY	A	B	C	D
LPV DA	1601-1½ 250 (300-1½)			
LNAV/VNAV DA	1815-1 464 (500-1)			
LNAV MDA	1880-1½ 529 (600-1½)		1880-1 529 (600-1)	1880-1¼ 529 (600-1¼)
CIRCLING	1880-1 515 (600-1)		2340-3 975 (1000-3)	2560-3 1195 (1200-3)