

WAAS
CH **93932**
W01A

APP CRS
007°

Rwy Ldg
TDZE **1387**
Apt Elev **1409**

RNAV (GPS) RWY 1


BEECH FACTORY (BEC)

Baro-VNAV NA when using Wichita Dwight D Eisenhower Ntl altimeter setting.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. Obtain local altimeter setting on CTAF; when not received, use Wichita Dwight D Eisenhower Ntl altimeter setting and increase all DA 36 feet and all MDA 40 feet; increase LPV all Cats and LNAV/VNAV all Cats visibility ½ mile, LNAV Cat C and D and Circling Cat C and D visibility ¼ mile.

MISSED APPROACH:
Climb to 3000 direct DOLBE and hold.

AWOS-3PT 119.45	WICHITA APP CON 134.8 269.1	BEECH TOWER ★ 126.8 (CTAF) 0 313.6	GND CON 121.7	UNICOM 122.95
---------------------------	---------------------------------------	--	-------------------------	-------------------------

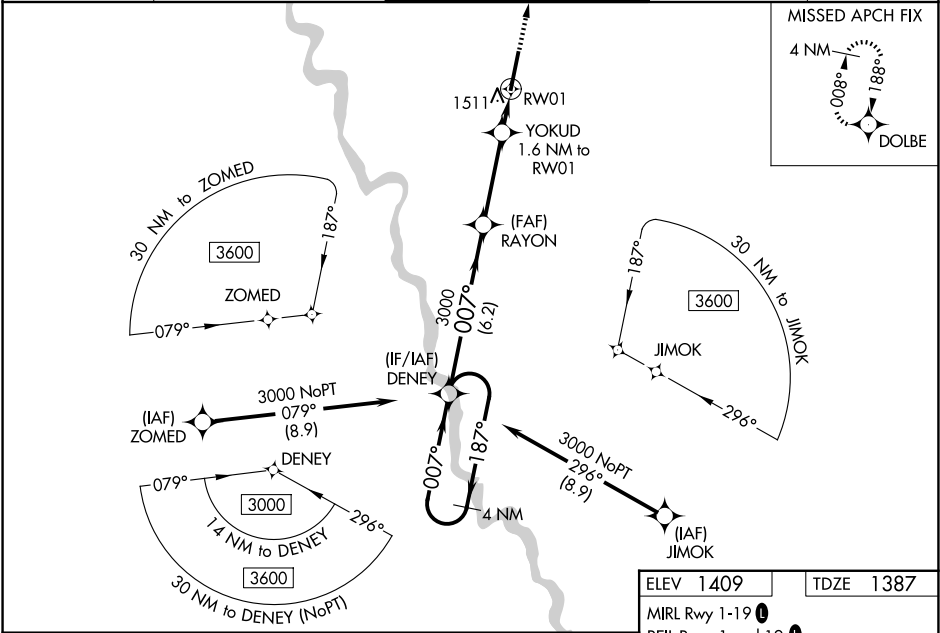

4 NM Holding Pattern

DENEY RAYON

3000 007° 187°

GP 3.00° TCH 45

3000 DOLBE

* LNAV only

YOKUD 1.6 NM to RW01

* 1920

RW01

6.2 NM 3.4 NM 1.6 NM

CATEGORY	A	B	C	D
LPV DA	1637-¾ 250 (300-¾)			
LNAV/VNAV DA	1688-1 301 (300-1)			
LNAV MDA	1780-1 393 (400-1)	1780-1½ 393 (400-1½)		
CIRCLING	1820-1 411 (500-1)	2120-1 711 (800-1)	2120-2 711 (800-2)	2120-2¼ 711 (800-2¼)

ELEV 1409 TDZE 1387

MIRL Rwy 1-19 0

REIL Rwys 1 and 19 0

TWR

8001 X 100

0.3% Up

007°