

ILS or LOC RWY 17  
STILLWATER RGNL (SWO)

**V** VDP NA when using Ponca City altimeter setting. When local altimeter setting not received, use Ponca City altimeter setting and increase S-ILS 17 DA to 1280 feet; increase all MDAs 80 feet and S-LOC 17 visibility Cats C/D  $\frac{1}{8}$  SM, and increase Circling Cat C visibility  $\frac{1}{4}$  SM and Cat D visibility  $\frac{1}{2}$  SM. For non ALS when using Ponca City altimeter setting, increase S-ILS 17 all Cats visibility to  $\frac{1}{8}$  SM.

MALSR

A5


10

**MISSED APPROACH:**  
Climb to 1500 then climbing  
right turn to 3200 direct  
GABEH LOM and hold,  
continue climb-in-hold to  
3200.

Procedure NA for arrival on PER VORTAC  
airway radials 110 CW 195.

PIONEER  
113.2 PER : - -  
Chan 79

3000 to GABEH LOM  
167° (30.8)

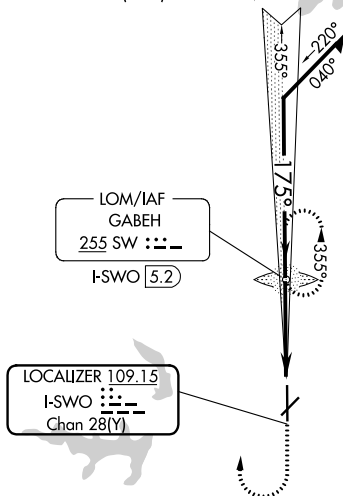


LOCALIZER 109.15  
I-SWO : : :  
Chan 28(Y)

MSA SW 25 NM

3100

ALTERNATE MISSED  
APCH FIX



PIONEER  
113.2 PER :--  
Chan 79

|         | 60   | 90   | 120  | 150  | 180  |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 3:48 | 2:32 | 1:54 | 1:31 | 1:16 |

STILLWATER RGNL (SWO)  
ILS or LOC RWY 17