

VOR/DME SWO 108.4 Chan 21	APP CRS 178°	Rwy Ldg 7401 TDZE 1000 Apt Elev 1000	VOR RWY 17 STILLWATER RGNL (SWO)
---	------------------------	---	-------------------------------------

⚠




When local altimeter setting not received, use Ponca City Rgnl altimeter setting and increase all MDA 80 feet and Circling Cat D visibility ½ mile. VDP NA with Ponca City altimeter setting. For inop MALSR increase S-17 Cats A/B visibility to 1 mile. Helicopter visibility reduction below ¾ SM NA.

MALSR

MISSED APPROACH:

Climbing right turn to 2600
direct SWO VOR/DME
and hold.

ASOS 135.725	KANSAS CITY CENTER 127.8 319.1	STILLWATER TOWER ★ 125.35 (CTAF)	GND CON 121.6	UNICOM 122.95
------------------------	--	--	-------------------------	-------------------------

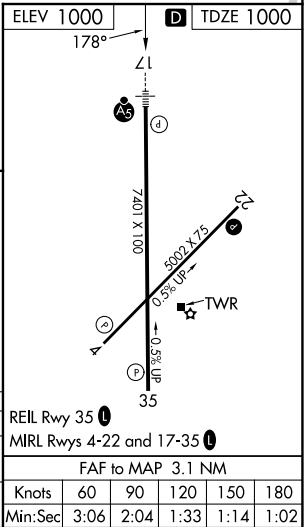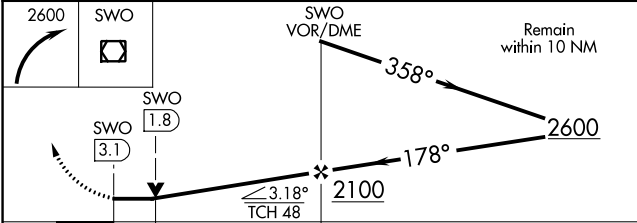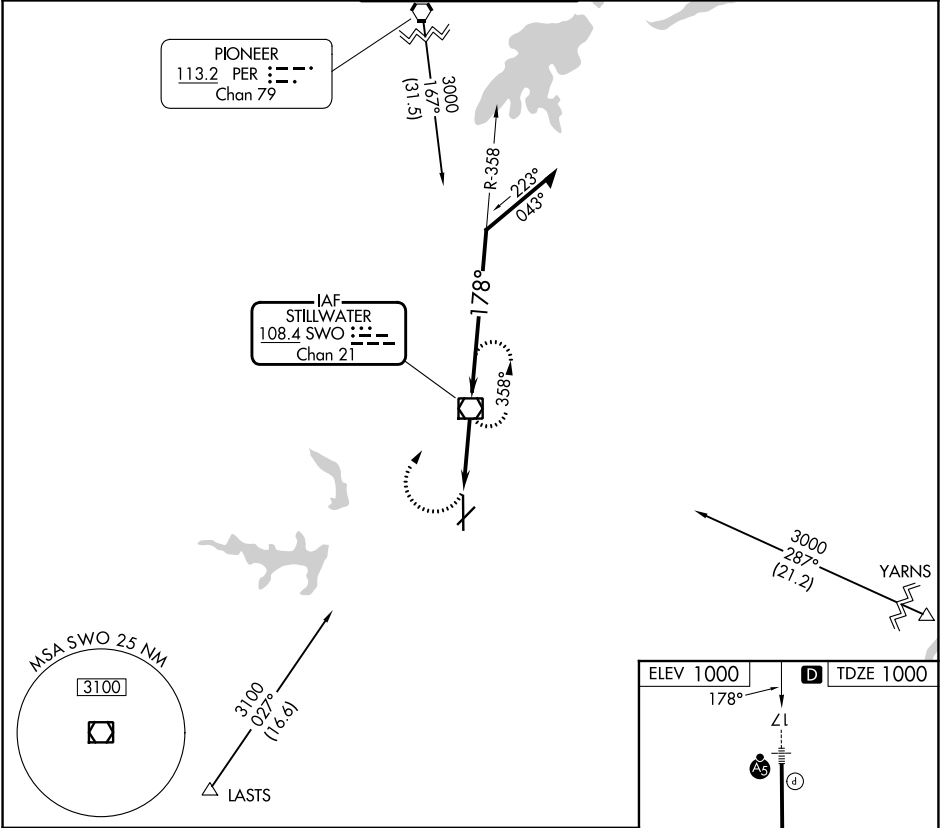

CATEGORY	A	B	C	D
S-17	1460-¾ 460 (500-¾)			1460-1 460 (500-1)
CIRCLING	1460-1 460 (500-1)		1520-1½ 520 (600-1½)	1740-2¼ 740 (800-2¼)

REIL Rwy 35

MIRL Rwy 4-22 and 17-35

FAF to MAP 3.1 NM

Knots	60	90	120	150	180
Min:Sec	3:06	2:04	1:33	1:14	1:02

SC-1, 06 AUG 2026 to 03 SEP 2026

SC-1, 06 AUG 2026 to 03 SEP 2026