

LOC I-BRD 109.9	APP CRS 231°	Rwy Ldg TDZE Apt Elev	6512 1224 1232
---------------------------	------------------------	-----------------------------	---

ILS or LOC RWY 23
BRAINERD LAKES RGNL (BRD)

A ADF required. When local altimeter setting not received, use Aitkin altimeter setting and increase all DAs 52 feet and all MDAs 60 feet. Increase S-LOC Cat C visibility to 1 SM and Circling Cat D visibility to 2¼ SM.



MALSR

A5


Diagram showing a vertical line with horizontal bars at the top, connected to a dashed line below it.

MISSED APPROACH: Climb to 2100 then climbing right turn to 3000 direct LAREW LOM and hold.

ASOS 126.775	MINNEAPOLIS CENTER 118.05 239.0	UNICOM 122.7 (CTAF) 0
------------------------	---	---------------------------------

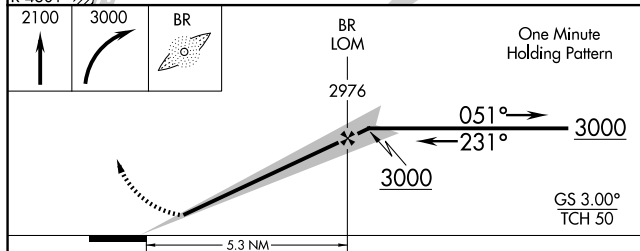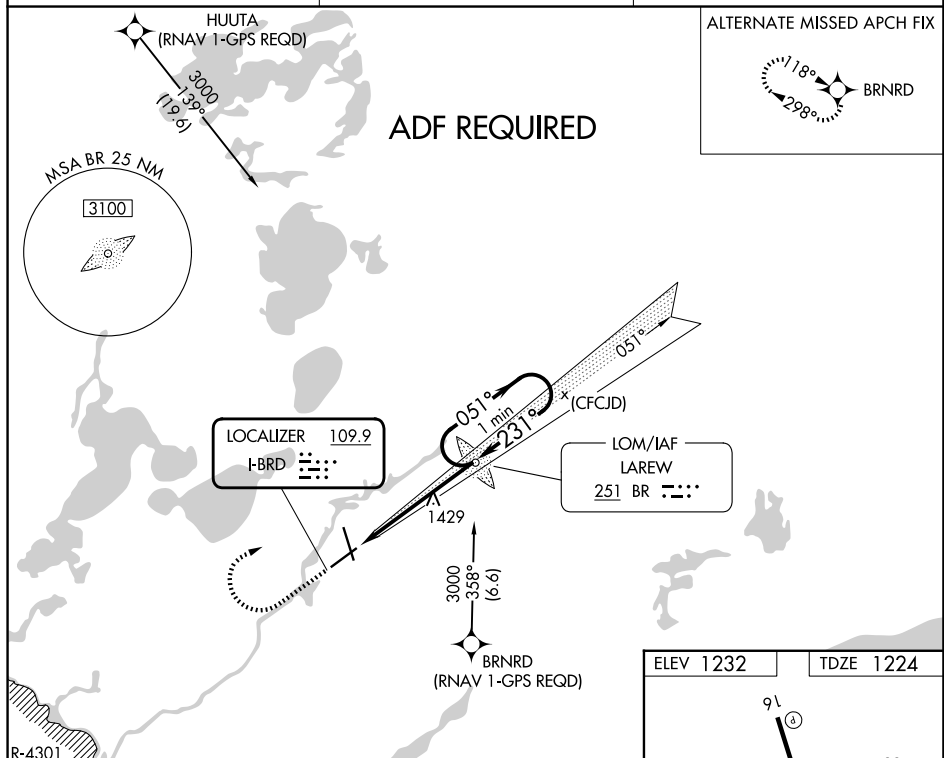

CATEGORY	A	B	C	D
S-ILS 23	1424-½ 200 (200-½)			
S-LOC 23	1680-½ 456 (500-½)		1680-⅞ 456 (500-⅞)	1680-1 456 (500-1)
CIRCLING	1760-1 528 (600-1)		1760-1½ 528 (600-1½)	1860-2 628 (700-2)

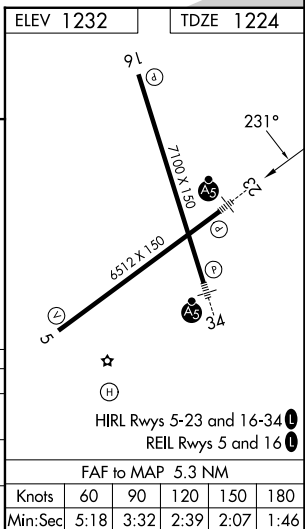BRAINERD LAKES RGNL (BRD)
ILS or LOC RWY 23