
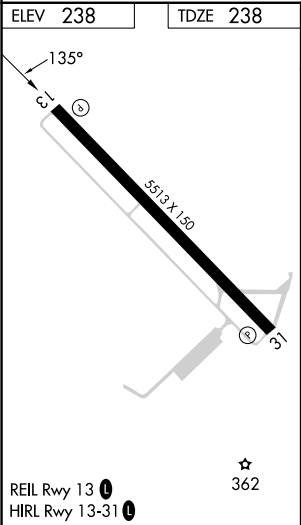


|                                        |                        |                                                   |
|----------------------------------------|------------------------|---------------------------------------------------|
| WAAS<br>CH <b>45704</b><br><b>W13A</b> | APP CRS<br><b>135°</b> | Rwy Ldg<br>TDZE <b>238</b><br>Apt Elev <b>238</b> |
|----------------------------------------|------------------------|---------------------------------------------------|

RNAV (GPS) RWY 13  
HESLER/NOBLE FLD (LUL)

|                                                                                                        |                                                       |
|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------|
| RNP APCH - GPS.<br>▼ For uncompensated Baro-VNAV systems, LNAV/VNAV<br>▲ NA below -15°C or above 54°C. | MISSED APPROACH: Climb to 2000 direct IPAXE and hold. |
|--------------------------------------------------------------------------------------------------------|-------------------------------------------------------|

|                            |                                      |                                  |
|----------------------------|--------------------------------------|----------------------------------|
| AWOS-3PT<br><b>119.275</b> | HOUSTON CENTER<br><b>126.8 327.8</b> | UNICOM<br><b>123.05 (CTAF) 0</b> |
|----------------------------|--------------------------------------|----------------------------------|

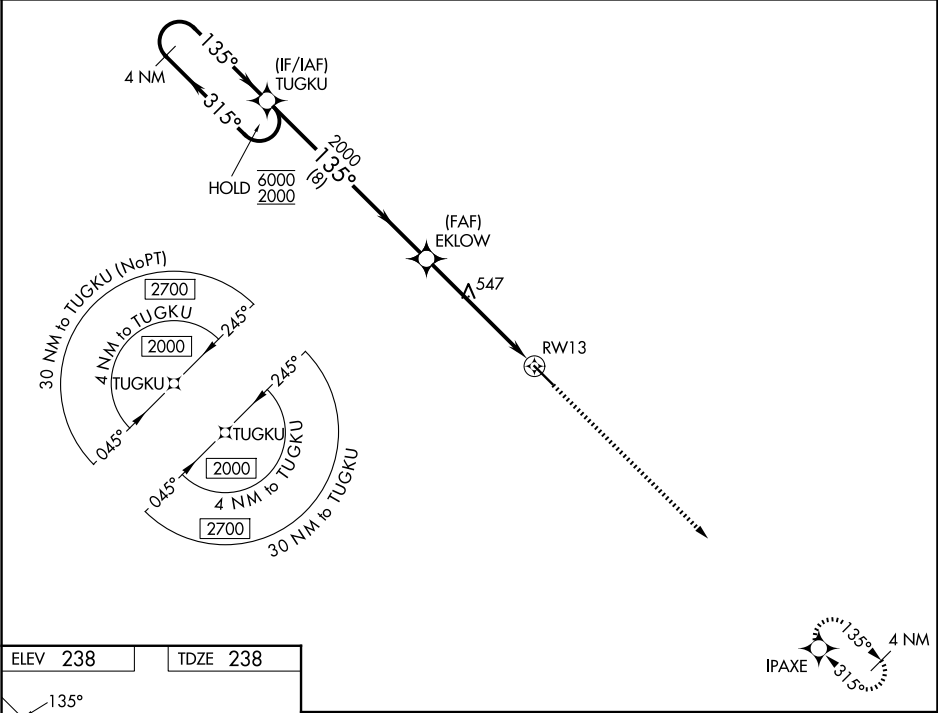

|                      |                     |             |                      |                      |       |
|----------------------|---------------------|-------------|----------------------|----------------------|-------|
| 4 NM Holding Pattern |                     |             |                      | 2000                 | IPAXE |
| TUGKU                |                     |             |                      | 2000                 |       |
| EKLLOW               |                     |             |                      | 2000                 |       |
| 1.7 NM to RWY13      |                     |             |                      |                      |       |
| RWY13                |                     |             |                      |                      |       |
| GP 3.00° TCH 40      |                     |             |                      |                      |       |
| 8 NM                 |                     |             |                      |                      |       |
| 3.8 NM               |                     |             |                      |                      |       |
| 1.7 NM               |                     |             |                      |                      |       |
| CATEGORY             | A                   | B           | C                    | D                    |       |
| LPV DA               | 488-1 250 (300-1)   |             |                      |                      |       |
| LNAV/VNAV DA         | 759-1¾ 521 (600-1¾) |             |                      |                      |       |
| LNAV MDA             | 800-1               | 562 (600-1) | 800-1½ 562 (600-1½)  | 800-2 562 (600-2)    |       |
| CIRCLING             | 800-1               | 562 (600-1) | 1040-2¼ 802 (900-2¼) | 1060-2¾ 822 (900-2¾) |       |