

LOC I-TIW

109.1

APP CRS

167°

Rwy Ldg

5002

TDZE

294

Apt Elev

295

ILS or LOC RWY 17

TACOMA NARROWS (TIW)

⚠ When control tower closed, obtain local altimeter setting on UNICOM, when not received, use McCord Fld altimeter setting minimums.

⚠ Circling not authorized east of Rwy 17-35.

MALSR

MISSED APPROACH: Climb to 1500, then climbing right turn to 2000 via heading 290° and SEA VORTAC R-227 to SCENN INT and hold.

ATIS

124.05

SEATTLE APP CON

120.1 290.9

TACOMA TOWER★


118.5 (CTAF) 0 253.5

GND CON

121.8

UNICOM

122.95

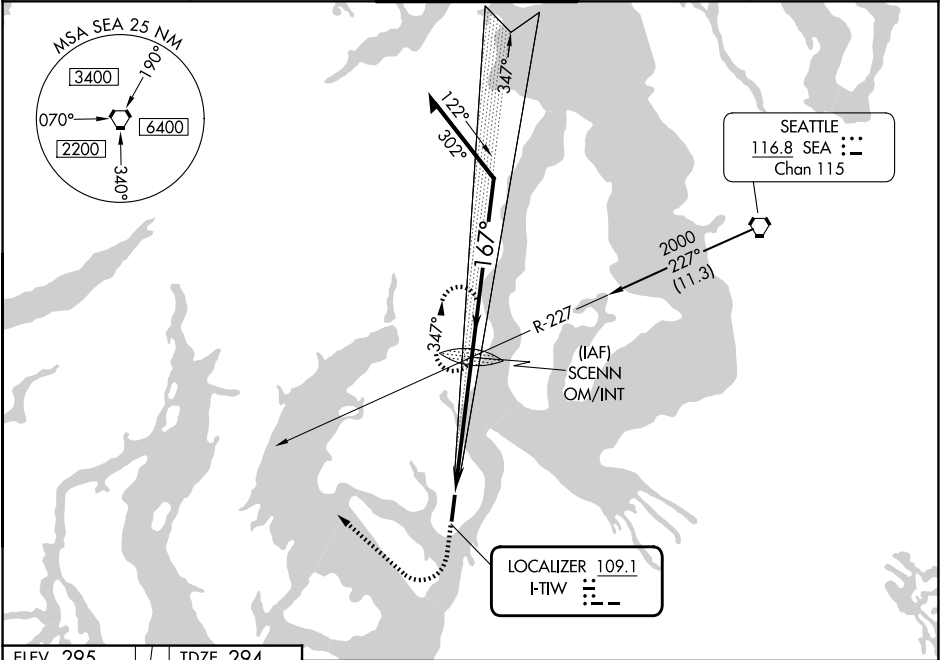

ELEV 295

TDZE 294

167°

45

41

4

35

5002 X 100

TWR

REIL Rwy 35

MIRL Rwy 17-35

FAF to MAP 5 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:00 | 3:20 | 2:30 | 2:00 | 1:40 |

1500

2000

SEA R-227

SCENN INT

SCENN OM/INT

1964

347°

167°

2000

2000

5 NM

Remain within 10 NM

GS 3.00°

TCH 52

| CATEGORY                               | A                     | B             | C                            | D                    |
|----------------------------------------|-----------------------|---------------|------------------------------|----------------------|
| S-ILS 17                               | 494-1/2 200 (200-1/2) |               |                              |                      |
| S-LOC 17                               | 760-1/2               | 466 (500-1/2) | 760-3/4<br>466 (500-3/4)     | 760-1<br>466 (500-1) |
| CIRCLING                               | 760-1                 | 465 (500-1)   | 820-1 1/2<br>525 (600-1 1/2) | 860-2<br>565 (600-2) |
| MCCHORD FLD ALTIMETER SETTING MINIMUMS |                       |               |                              |                      |
| S-ILS 17                               | 519-1/2 225 (300-1/2) |               |                              |                      |
| S-LOC 17                               | 780- 1/2              | 486 (500-1/2) | 780-3/4<br>486 (500-3/4)     | 780-1<br>486 (500-1) |
| CIRCLING                               | 800-1                 | 505 (600-1)   | 860-1 1/2<br>565 (600-1 1/2) | 900-2<br>605 (700-2) |