

WAAS CH 77836 W22A	APP CRS 217°	Rwy Ldg TDZE 1119 Apt Elev 1119
--	------------------------	---

RNAV (GPS) RWY 22


THIEF RIVER FALLS RGNL (TVF)

⚠

Baro-VNAV and VDP NA when using Crockston altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crockston altimeter setting and increase all DA 82 feet and all MDA 100 feet. Increase LPV all Cats visibility to 1½ mile and LNAV/VNAV all Cats visibility to 1¼ mile.

MISSED APPROACH:
Climb 3300 direct
BOOMS and hold.

AWOS-3PT 119.025	MINNEAPOLIS CENTER 132.15 269.6	UNICOM 122.8 (CTAF) 1
----------------------------	---	---------------------------------

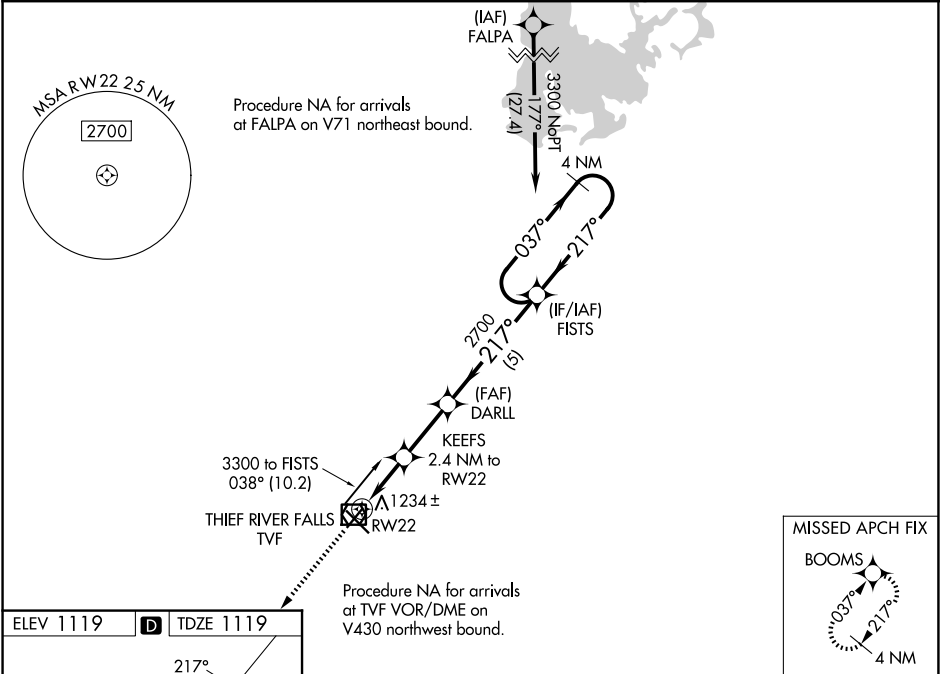

HIRL Rwy 13-31 **1**

MIRL Rwy 4-22 **1**

REIL Rws 4, 13 and 22 **1**

3300

↑

BOOMS

☼

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.00°/TCH 34).

FISTS

4 NM Holding Pattern

3300

037° →

← 217°

GP 3.00°

TCH 40

KEEFS

2.4 NM to RW22

DARLL

2700

1920*

1.1 NM

1.3 NM

2.4 NM

5 NM

CATEGORY

A

B

C

D

LPV DA

1369-1

250 (300-1)

NA

LNAV/VNAV DA

1396-1

277 (300-1)

NA

LNAV MDA

1500-1

381 (400-1)

NA

CIRCLING

1540-1
421 (500-1)

1580-1
461 (500-1)

NA