

WAAS CH 69311 W31A	APP CRS 313°	Rwy Ldg 6304 TDZE 1114 Apt Elev 1119
--	------------------------	---

RNAV (GPS) RWY 31
THIEF RIVER FALLS RGNL (TVF)

RNP APCH - GPS.



Baro-VNAV and VDP NA when using CKN altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use CKN altimeter setting: increase LPV DA to 1447 feet; increase LNAV/VNAV DA to 1569 feet and all visibilities ½ SM; increase all MDAs 100 feet and visibility Cats C and D ¼ SM. For inop ALTS, increase LNAV/VNAV all Cts visibility to 1 SM and LNAV Cts C/D visibility to 1 ½ SM.

MALSR



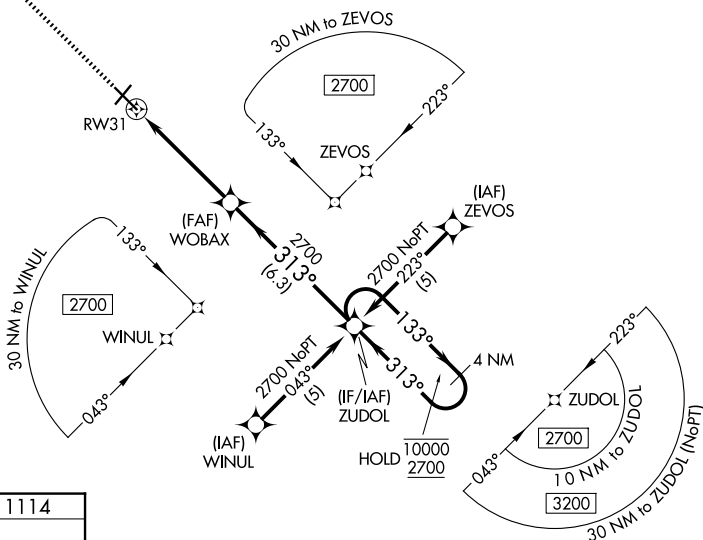
MISSED APPROACH: Climb to 2700 direct WIMUS and hold.

AWOS-3PT
119.025

MINNEAPOLIS CENTER
132.15 269.6


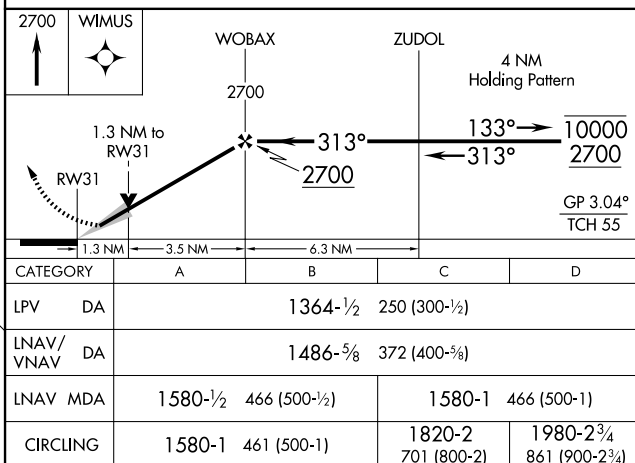
UNICOM
122.8 (CTAF) 

MISSED APCH FIX



ELEV 1119

D TDZE 1114

HIRL Rwy 13-31 **L**MIRL Rwy 4-22 **L**REIL Rwys 4, 13 and 22 **L**

THIEF RIVER FALLS, MINNESOTA
Orig-C 25DEC25

48°04'N-96°11'W

THIEF RIVER FALLS RGNL (TVF)
RNAV (GPS) RWY 31