


WAAS CH 61300 W30A	APP CRS 296°	Rwy Idg TDZE 619 Apt Elev 632	5500
--	------------------------	---	-------------

RNAV (GPS) RWY 30


BUTLER COUNTY RGNL/HOGAN FLD (HAO)


RNP APCH - GPS.			MALS	MISSED APPROACH: Climb to 2700 direct MONTR and hold.
For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. Inop table does not apply to LPV.				

ASOS 121.425	CINCINNATI APP CON 121.0 254.25	CLNC DEL 126.25	UNICOM 123.05 (CTAF) 0
------------------------	---	---------------------------	----------------------------------

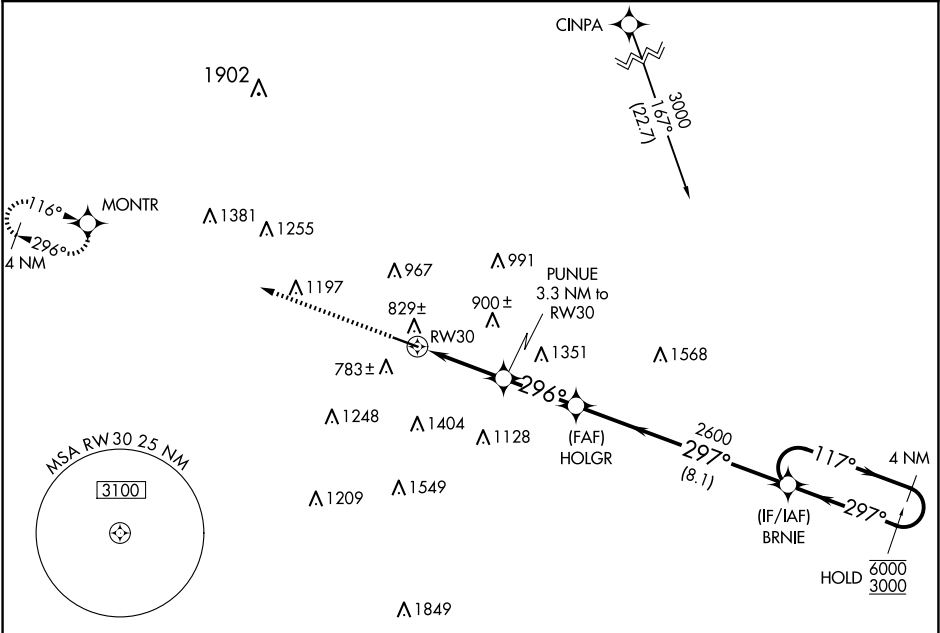

ELEV 632	TDZE 619
-----------------	-----------------

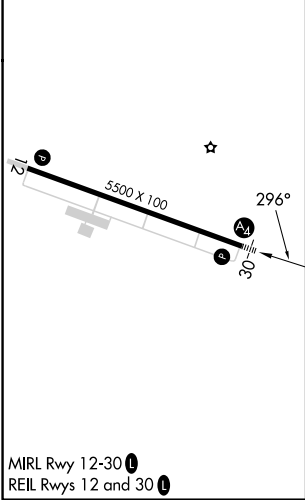

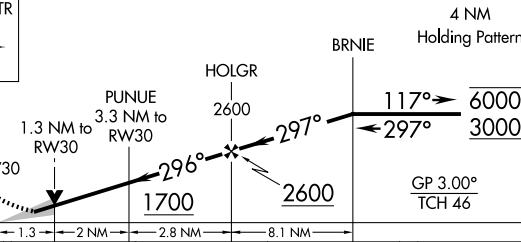2700	MONTR	4 NM Holding Pattern			
					
CATEGORY	A	B	C	D	
LPV DA	819-3/4 200 (200-3/4)				
LNAV/VNAV DA	1080-1 1/8 461 (500-1 1/8)				
LNAV MDA	1080-3/4 461 (500-3/4)	1080-1 1/8 461 (500-1 1/8)			
CIRCLING	1280-1 648 (700-1)	1300-1 3/4 668 (700-1 3/4)	1760-3 1128 (1200-3)		