


RNAV (GPS) RWY 10
BEAVER COUNTY (BVI)

Baro-VNAV and VDP NA when using Pittsburgh Inrl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 36°C (96°F). When local altimeter setting not received, use Pittsburgh Inrl altimeter setting; increase all DA 50 feet; increase all MDAs 60 feet and visibility LNAV Cats C and D ½ SM.

Circling Rwy 28 NA at night. Rwy 10 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH: Climb to 3000 direct JEDUV and hold.


ATIS 118.35	PITTSBURGH APP CON 338.2	BEAVER COUNTY TOWER ★ 120.3 (CTAF) 0	GND CON 121.8
-----------------------	------------------------------------	---	-------------------------

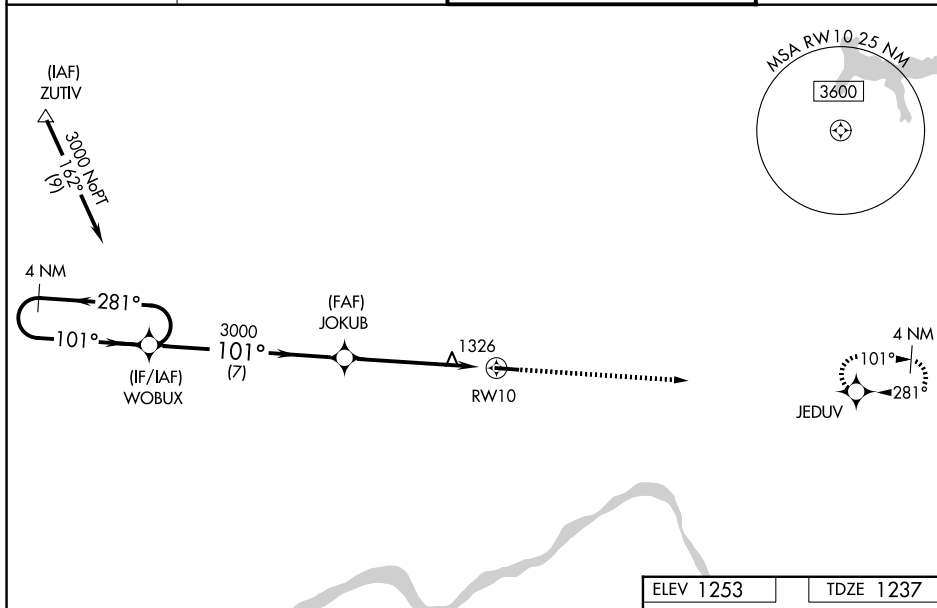

VGS1 and RNAV glidepath not coincident
(VGS1 Angle 3.00°/TCH 42).

JEDUV
* RNAV only

CATEGORY	A	B	C	D
LPV DA		1528-1	290 (300-1)	
RNAV/ VNAV DA		1514-1	276 (300-1)	
RNAV MDA		1580-1	342 (400-1)	
CIRCLING	1720-1	467 (500-1)	1720-1½ 467 (500-1½)	1820-2 567 (600-2)

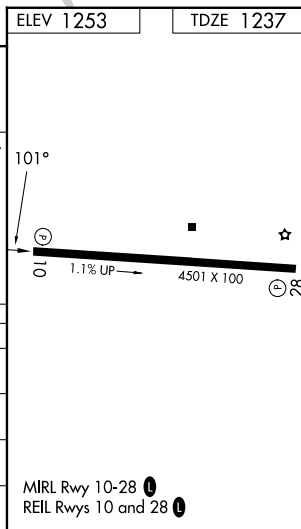

NE-4, 06 AUG 2026 to 03 SEP 2026