

WAAS CH 65806 W23A	APP CRS 230°	Rwy Ldg TDZE 262 Apt Elev 262
--	------------------------	---

RNAV (GPS) RWY 23

JONESBORO MUNI (JBR)

RNP APCH.

▼


▲

Circling NA northwest of Rwy 5-23. Circling Rwy 31 NA at night. Baro-VNAV and VDP NA when using Walnut Ridge altimeter setting. Rwy 23 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -12°C or above 54°C. For inop ALS, increase LPV Cat A/B visibility to $\frac{1}{2}$ SM. Inop table does not apply to LNAV/VNAV. For inop ALS when using Walnut Ridge altimeter setting, increase LPV Cat A/B visibility to 1 SM. When using Walnut Ridge altimeter setting, inop table does not apply to LNAV/VNAV. When local altimeter setting not received, use Walnut Ridge altimeter setting: increase LPV DA to 600 feet, LNAV/VNAV DA to 630 feet and all visibilities $\frac{1}{2}$ SM; increase all MDAs 60 feet and LNAV Cat C/D and Circling Cat C visibility $\frac{1}{4}$ SM.

ODALS

MISSED APPROACH:
Climb to 2300 direct YIGUY and hold.

ASOS 118.525	MEMPHIS CENTER 120.075 289.4	UNICOM 123.0 (CTAF) ①
------------------------	--	---------------------------------

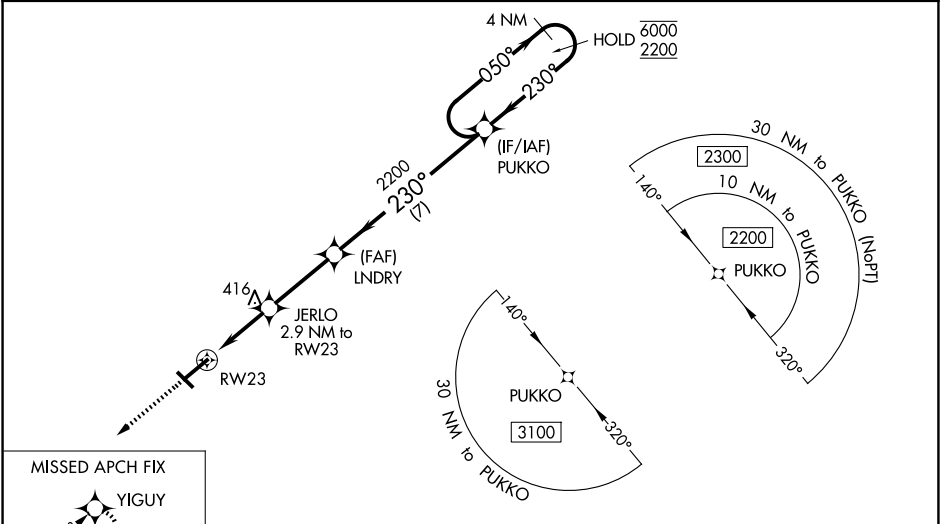

MISSED APCH FIX

YIGUY

4 NM

2300

YIGUY

*LNAV only.

1.2 NM to RW23

JERLO 2.9 NM to RW23

LNDRY 2200

PUKKO

4 NM Holding Pattern

230°

050°

6000

2200

GP 3.00°

TCH 53

CATEGORY	A	B	C	D
LPV DA	546- $\frac{3}{4}$ 284 (300- $\frac{3}{4}$)			
LNAV/VNAV DA	576- $\frac{7}{8}$ 314 (400- $\frac{7}{8}$)			
LNAV MDA	680- $\frac{3}{4}$ 418 (500- $\frac{3}{4}$)		680-1 418 (500-1)	
CIRCLING	740-1 478 (500-1)		820-1 $\frac{1}{2}$ 558 (600-1 $\frac{1}{2}$)	1080-2 $\frac{3}{4}$ 818 (900-2 $\frac{3}{4}$)

ELEV 262

TDZE 262

MIRL Rwy 5-23 and 13-31 ①