



WAAS CH 60902 W17A	APP CRS 171°	Rwy Ldg TDZE 383 Apt Elev 390
--	------------------------	---

RNAV (GPS) RWY 17


LEESBURG EXEC (JYO)

RNP APCH - GPS.	ODALS	MISSED APPROACH: Climb to 1100 then climbing right turn to 4000 direct KORNLY and hold, continue climb-in-hold to 4000.
Inop table does not apply to LPV all Cats. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV Cats A/B visibility to 1 SM and LNAV Cats C/D visibility to 1½ SM.		

AWOS-3 125.225	POTOMAC APP CON 125.05 338.25	LEESBURG TOWER ★ 127.5 (CTAF) 0	GND CON 120.5	UNICOM 122.975
--------------------------	---	---	-------------------------	--------------------------

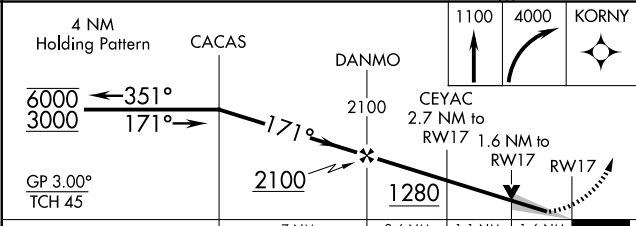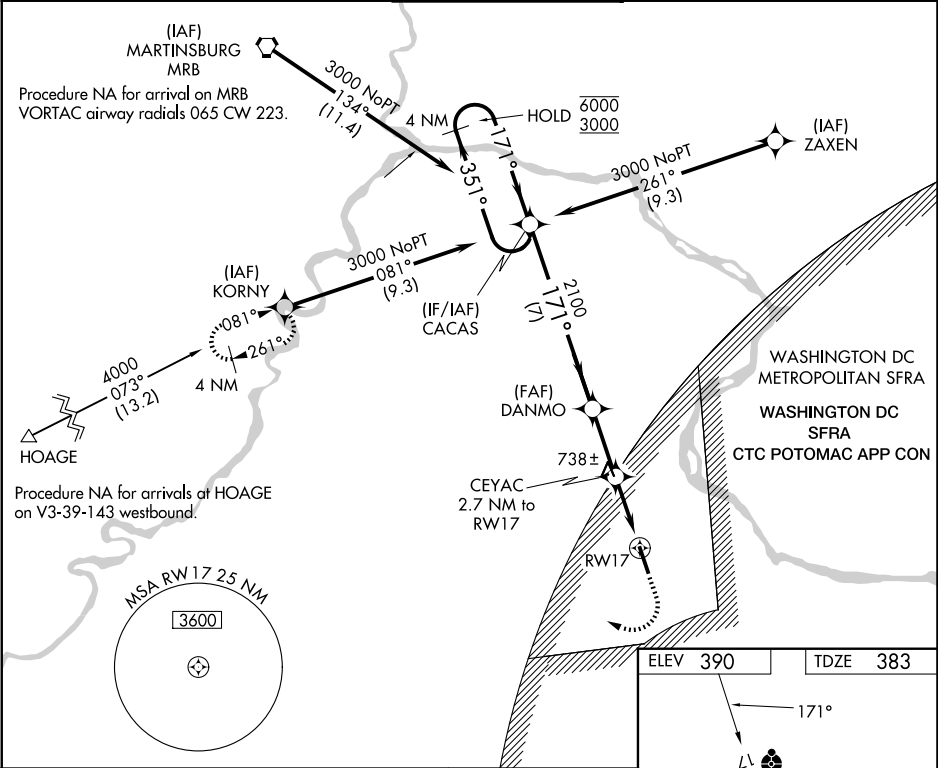

CATEGORY	A	B	C	D
LPV DA	633-1	250 (300-1)		
LNAV/VNAV DA	725-1	342 (400-1)		
LNAV MDA	940-1 557 (600-1)	940-1½ 557 (600-1½)		
CIRCLING	940-1 550 (600-1)	1040-1¾ 650 (700-1¾)	1300-3 910 (1000-3)	

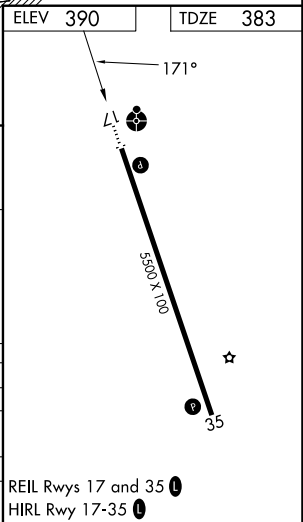

NE-3, 06 AUG 2026 to 03 SEP 2026

NE-3, 06 AUG 2026 to 03 SEP 2026