

WAAS CH 56517 W12A	APP CRS 121°	Rwy Ldg 6001 TDZE 1339 Apt Elev 1339
--	------------------------	---

RNAV (GPS) RWY 12
SPENCER MUNI (SPW)


RNP APCH-GPS.

⚠ Baro-VNAV and VDP NA when using Estherville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C. When local altimeter setting not received, use Estherville altimeter setting: increase LPV DA to 1599 feet, LNAV/VNAV DA to 1650 feet; increase all MDAs 60 feet, and visibility LNAV Cat C/D 1/8 SM, and Circling Cat C/D 1/4 SM. For inop ALS when using Estherville altimeter setting, increase LNAV/VNAV all Cats visibility to 1/8 SM and LNAV Cts C/D to 1 SM. For inop ALS, increase LNAV/VNAV all Cts visibility to 3/8 SM and LNAV Cat C/D to 1 SM.

MALSR


MISSED APPROACH:
Climb to 4000 direct
ONUWA and hold.

ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

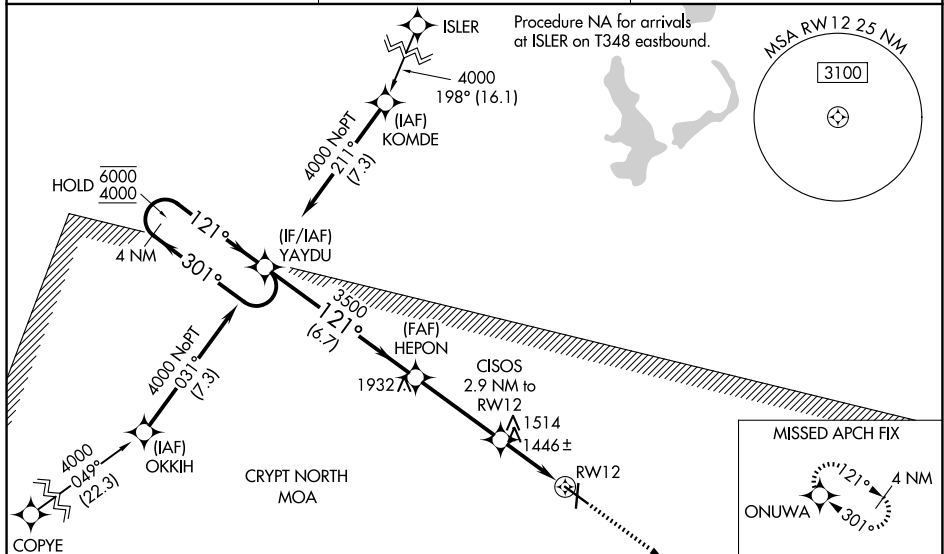

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026

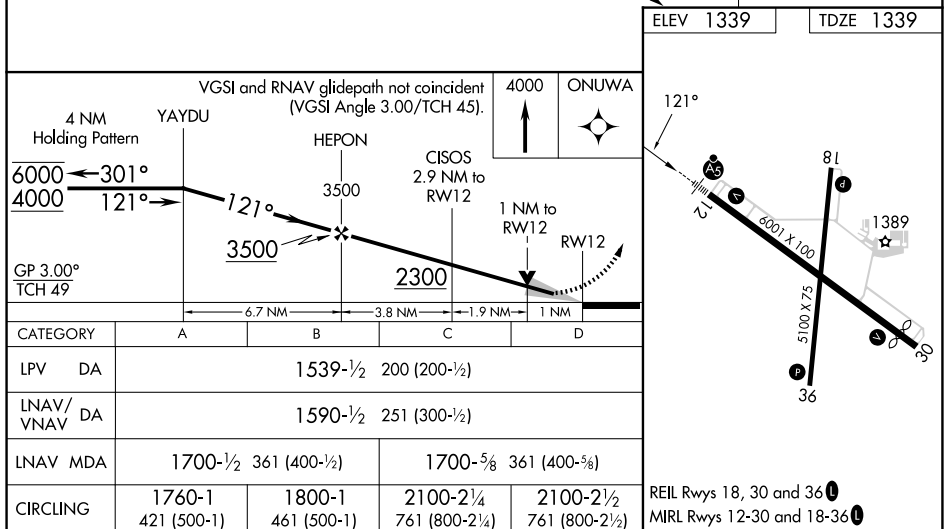

SPENCER, IOWA

Amdt 1 27JAN22

43°10'N-95°12'W

SPENCER MUNI (SPW)

RNAV (GPS) RWY 12