

WAAS CH 61333 W18A	APP CRS 181°	Rwy Ldg TDZE 1338 Apt Elev 1339
--	------------------------	---


RNAV (GPS) RWY 18

SPENCER MUNI (SPW)


Baro-VNAV and VDP NA when using Estherville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C (-4°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Estherville altimeter setting and increase all DA/MDA 60 feet; increase LNAV/VNAV all Cats visibility to 1½ mile.

MISSED APPROACH:
Climb to 4000 direct
ICOSU and hold.

ASOS 126.625	MINNEAPOLIS CENTER 127.75 257.7	UNICOM 123.0 (CTAF) 0
------------------------	---	---------------------------------

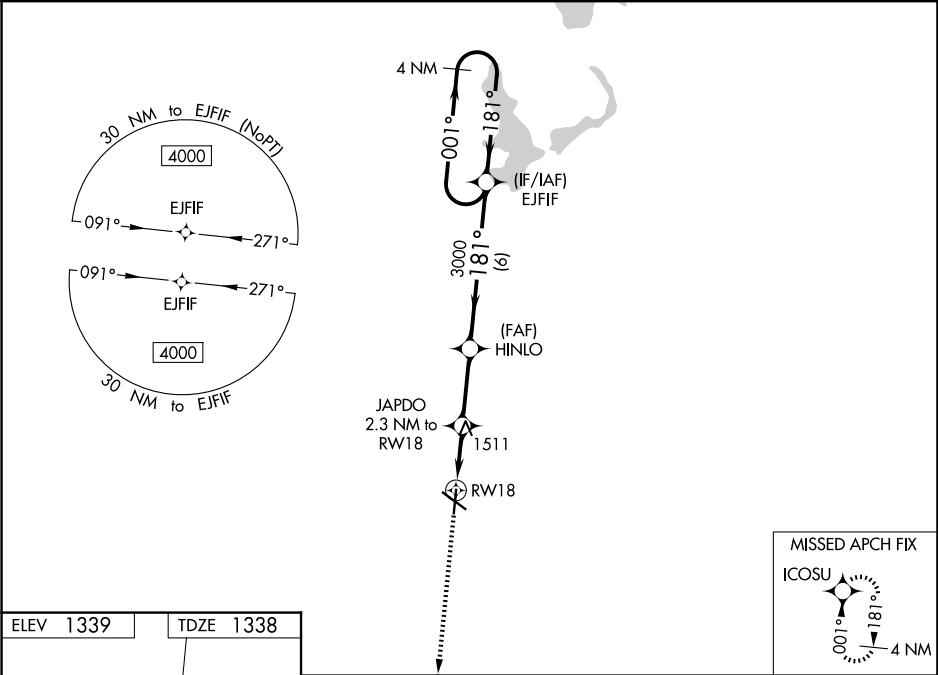

ELEV 1339	TDZE 1338
-----------	-----------

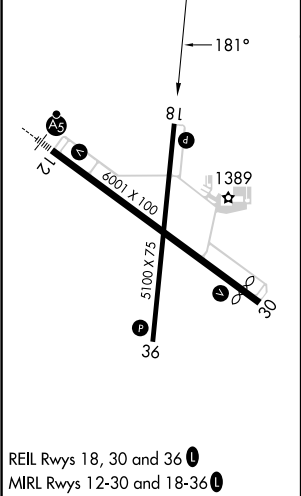

	4000	ICOSU	JAPDO 2.3 NM to RW18	HINLO	EJFIF	4 NM Holding Pattern
			*1.2 NM to RW18	3000	181°	001°
			2120*	3000	181°	4000
			1.2	1.1	2.8 NM	6 NM
CATEGORY	A	B	C	D		
LPV DA	1588-1	250 (300-1)			NA	
LNAV/VNAV DA	1608-1	270 (300-1)			NA	
LNAV MDA	1780-1	442 (500-1)			NA	
CIRCLING	1780-1 441 (500-1)	1820-1 481 (500-1)			NA	

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026