

LOC I-CPS 109.1	APP CRS 302°	Rwy Ldg TDZE 411 Apt Elev 413
---------------------------	------------------------	---

ILS or LOC RWY 30L

ST LOUIS DOWNTOWN (CPS)


⚠

Circling Rwy 5, 23 NA at night. When local altimeter setting not received, use STL altimeter setting and increase S-ILS 30L DA to 663 feet; increase all MDAs 60 feet and S-LOC 30L visibility Cat C/D ½ SM, and Circling visibility Cat C ¼ SM. For inop ALS increase S-LOC 30L Cat C/D visibility to 1 ¼ SM.

MALSR

MISSED APPROACH: Climb to 1400 then climbing left turn to 3000 on heading 220° and STL R-170 to ARNOL INT/STL 36.2 DME and hold.

ATIS 121.45	ST LOUIS APP CON 123.7 371.875	DOWNTOWN TOWER ★ 119.925 (CTAF) 0 379.3	GND CON 121.8	UNICOM 122.95
-----------------------	--	---	-------------------------	-------------------------

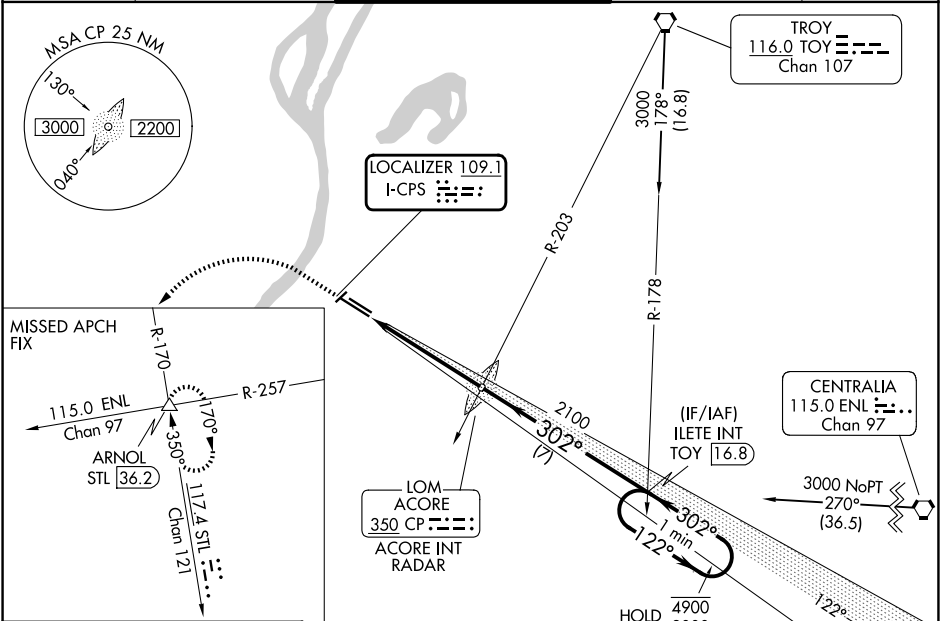

ELEV 413	D	TDZE 411
-----------------	----------	-----------------

HIRL Rwy 12R-30L
REIL Rwys 12L and 12R
REIL Rwy 30R
MIRL Rwys 5-23 and 12L-30R
FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

One Minute Holding Pattern				
1400		3000	hdg 220°	STL R-170
			ARNOL	△
		CP LOM ACORE INT RADAR	1990	
		ILETE INT TOY 16.8		
		122°	4900	3000
		302°		
		2100		
		4.8 NM	7 NM	
CATEGORY	A	B	C	D
S-ILS 30L	611-1½		200 (200-½)	
S-LOC 30L	1020-1½	609 (700-½)	1020-1⅓	609 (700-1⅓)
CIRCLING	1020-1 607 (700-1)	1120-1 707 (800-1)	1240-2½ 827 (900-2½)	1380-3 967 (1000-3)