

WAAS CH 93615 W27B	APP CRS 273°	Rwy Ldg TDZE Apt Elev	5003 8 10
--	------------------------	-----------------------------	--------------------------------------

RNAV (GPS) RWY 27R

MIAMI EXEC (TMB)


▼

▲


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 49°C (120°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Miami Intl altimeter setting and adjust all DA 27 feet and all MDA 40 feet; increase LPV all Cats visibility ¼ mile, LNAV Cat D visibility ¼ mile, and Circling Cat D visibility ¼ mile. Baro-VNAV NA when using Miami Intl altimeter setting. Circling to Rwy 13, 31 NA at night.


MISSED APPROACH: Climb to 2000 direct JULED and hold.

ATIS 124.0	MIAMI APP CON 125.5 354.1	MIAMI EXEC TOWER ★ 118.9 (CTAF) 0	GND CON 121.7
----------------------	-------------------------------------	--	-------------------------

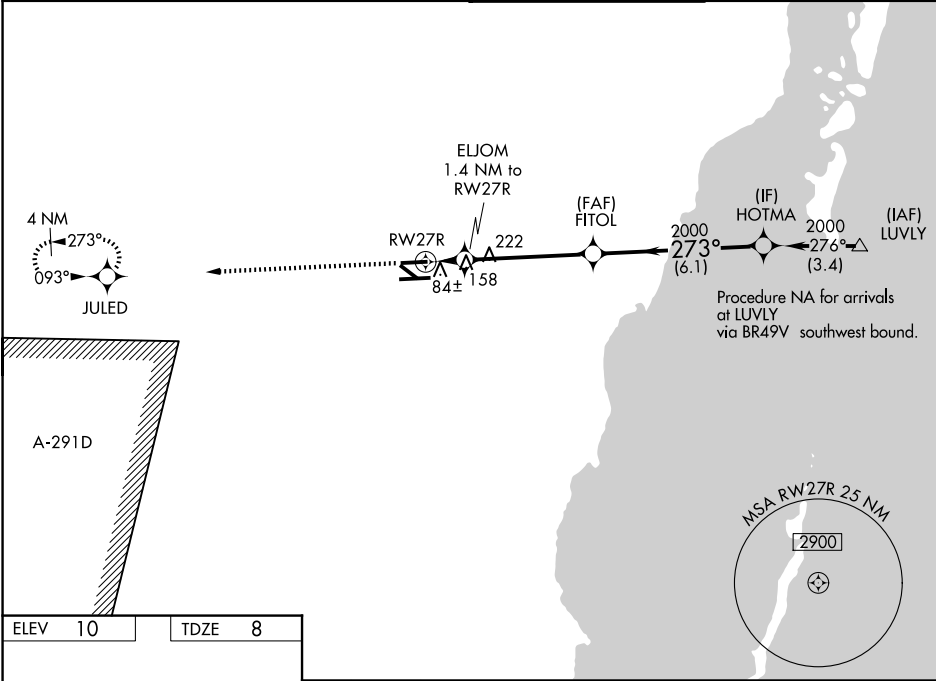

ELEV 10	TDZE 8
---------	--------

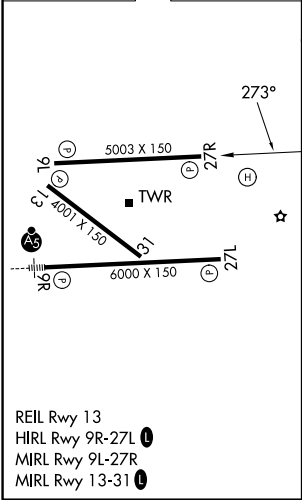

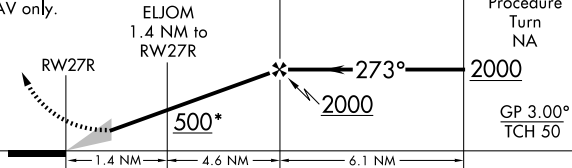2000	JULED				
					
*LNAV only.					
					
CATEGORY	A		B	C	D
LPV DA	258- $\frac{3}{4}$ 250 (300- $\frac{3}{4}$)				
LNAV/ VNAV DA	352-1 $\frac{1}{4}$ 344 (400-1 $\frac{1}{4}$)				
LNAV MDA	420-1 412 (500-1)		420-1 $\frac{1}{4}$ 412 (500-1 $\frac{1}{4}$)		
CIRCLING	460-1 450 (500-1)	560-1 550 (600-1)	640-1 $\frac{3}{4}$ 630 (700-1 $\frac{3}{4}$)	640-2 630 (700-2)	

SE-3, 06 AUG 2026 to 03 SEP 2026

SE-3, 06 AUG 2026 to 03 SEP 2026