


CHARLOTTE DEP CON  
120.05 307.8  
ASOS  
120.775


TOP ALTITUDE:  
3000

RNAV 1 - DME/DME/IRU or GPS.  
RADAR required.

TAKEOFF MINIMUMS  
Rwys 2, 20: Standard.

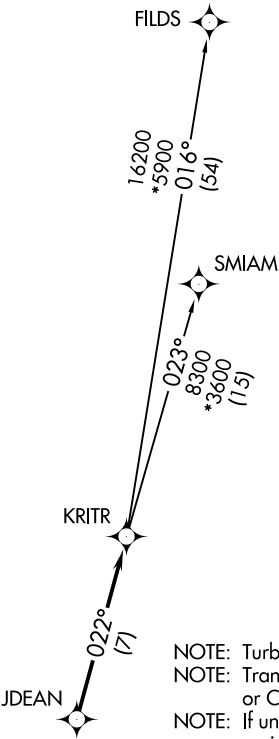

- NOTE: Turbojet only.
- NOTE: Transponder code will be issued via PDC or CLT CLNC DEL.
- NOTE: If unable to accept climb rates, advise ATC on initial contact.
- NOTE: Upon reaching 10000 MSL, accelerate to and maintain 280K, if unable advise ATC.



NOTE: Chart not to scale.



DEPARTURE ROUTE DESCRIPTION

Climb on heading assigned by ATC for RADAR vectors to JDEAN, then on track 022° to KRITR, then on assigned transition. Maintain 3000, expect filed altitude 10 minutes after departure.

- FILDS TRANSITION (KRITR8.FILDS)
- SMIAM TRANSITION (KRITR8.SMIAM)