


VORTAC EUF	APP CRS	Rwy Ldg	5000
109.2	187°	TDZE	285
Chan 29		Apt Elev	285

VOR RWY 18
WEEDON FLD (EUF)

NA When local altimeter setting not received, use Columbus, GA altimeter setting and increase all MDAs 40 feet and S-18 visibility Cats C and D ½ SM and Circling Cats C and D ¼ SM. Increase AFENY fix minimums S-18 visibility Cats C and D ½ SM and Circling visibility Cats C and D ¼ SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 2000 direct EUF VORTAC and hold.

ASOS 128.325	ATLANTA APP CON ★ 125.5 323.1	CLNC DEL 134.25 339.8	UNICOM 122.8 (CTAF) ①
------------------------	---	---------------------------------	---------------------------------

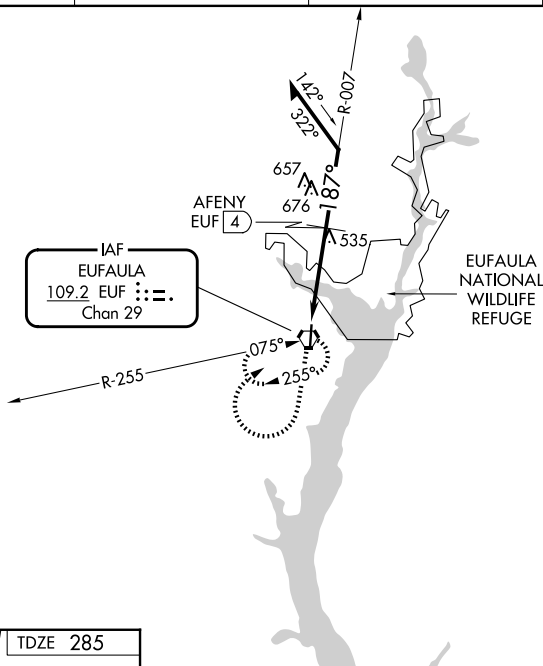

MSA EUF 25 NM

150°

330°

3300

2500

1500 2000 EUF

*1080 when using Columbus, GA altimeter setting.

EUF VORTAC

007°

187°

1040*

2000

4 NM

Remain within 10 NM

CATEGORY	A	B	C	D
S-18	1040-1 755 (800-1)	1040-1¼ 755 (800-1¼)	1040-2	755 (800-2)
CIRCLING	1040-1 755 (800-1)	1040-1¼ 755 (800-1¼)	1060-2¼ 775 (800-2¼)	1060-2½ 775 (800-2½)

AFENY FIX MINIMUMS (DME REQUIRED)

S-18	900-1 615 (700-1)	900-1¾ 615 (700-1¾)
CIRCLING	920-1 635 (700-1)	1060-2¼ 775 (800-2¼) 1060-2½ 775 (800-2½)