


LOC/DME I-LWR 110.7 Chan 44	APP CRS 180°	Rwy Ldg 6003 TDZE 213 Apt Elev 213
---	------------------------	--

ILS or LOC RWY 17

WEST MEMPHIS MUNI (A W M)

DME or RADAR required.	MALSR
NA For inop ALS, increase S-LOC 17 Cat C/D visibility to 1½ SM and KEHOE FIX MINIMUMS S-LOC 17 Cats C/D visibility to 1 SM.	MISSED APPROACH: Climb to 1000 then climbing right turn to 2000 on GQE VOR/DME R-147 to GQE VOR/DME and hold.

ASOS 118.175	MEMPHIS APP CON 119.1 291.6	CLNC DEL 121.7	UNICOM 123.05 (CTAF) 0
------------------------	---------------------------------------	--------------------------	---

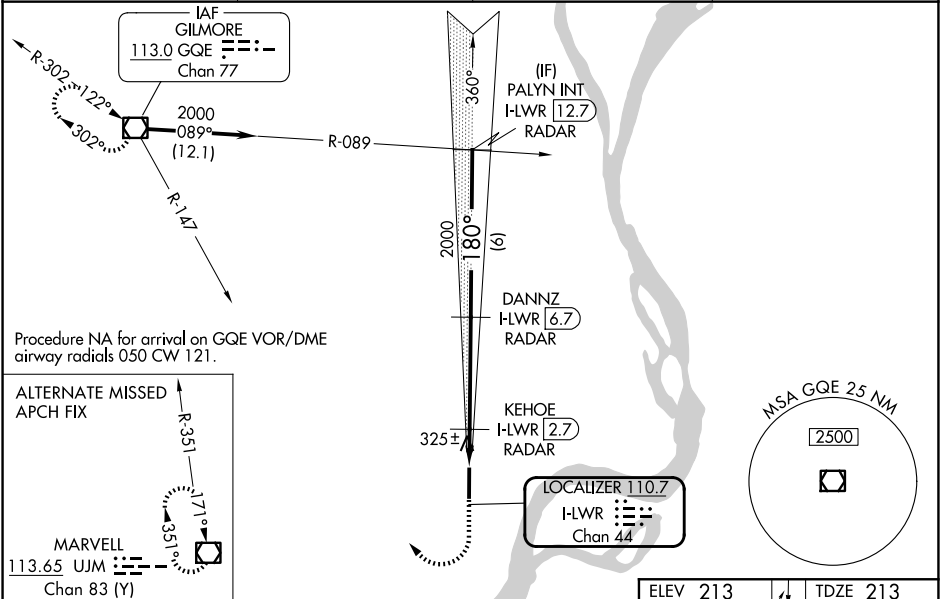

1000

↑

2000

GQE
R-147

GQE

DANZ
I-LWR 6.7
RADAR

PALYN INT
I-LWR 12.7
RADAR

KEHOE
I-LWR 2.7
RADAR

2000

180°

2000

680*

1.4 NM

4 NM

6 NM

GS 3.00°

TCH 51

*LOC only.

CATEGORY	A	B	C	D
S-ILS 17	413-½ 200 (200-½)			
S-LOC 17	680-½	467 (500-½)	680-1	467 (500-1)
CIRCLING	680-1 467 (500-1)	740-1 527 (600-1)	800-1½ 587 (600-1½)	920-2¼ 707 (800-2¼)
KEHOE FIX MINIMUMS				
S-LOC 17	580-½	367 (400-½)	580-⅝	367 (400-⅝)
CIRCLING	640-1 427 (500-1)	740-1 527 (600-1)	800-1½ 587 (600-1½)	920-2¼ 707 (800-2¼)

MIRL Rwy 17-35 0

REIL Rwy 35 0

FAF to MAP 5.5 NM

Knots	60	90	120	150	180
Min:Sec	5:30	3:40	2:45	2:12	1:50

ELEV 213

TDZE 213

180°

100 X 100

6003 X 6003

35

35