

WAAS CH 45720 W27A	APP CRS 272°	Rwy Ldg 5004 TDZE 903 Apt Elev 905
--	------------------------	---

RNAV (GPS) RWY 27L
OHIO STATE UNIVERSITY (OSU)


RNP APCH.

⚠ Baro-VNAV NA when using John Glenn Columbus Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. When local altimeter setting not received, use John Glenn Columbus Intl altimeter setting; increase LPV DA to 1178 feet; increase LNAV/VNAV DA to 1224 feet and all visibilities $\frac{1}{2}$ SM; increase all MDAs 40 feet and visibility LNAV Cat C $\frac{1}{2}$ SM and Cat D $\frac{1}{4}$ SM, and Circling Cat D $\frac{1}{4}$ SM. Circling Rwy 23 NA at night. Rwy 27L helicopter visibility reduction below $\frac{1}{2}$ SM NA.


MISSED APPROACH:
Climb to 3200 direct
GLYBU and hold.

ATIS 121.35	COLUMBUS APP CON 125.95 317.775	STATE TOWER ★ 118.8 (CTAF) 254.325	GND CON 121.7	UNICOM 122.95
-----------------------	---	--	-------------------------	-------------------------

Procedure NA for arrivals
on APE VORTAC
airway radials 168 CW 006.

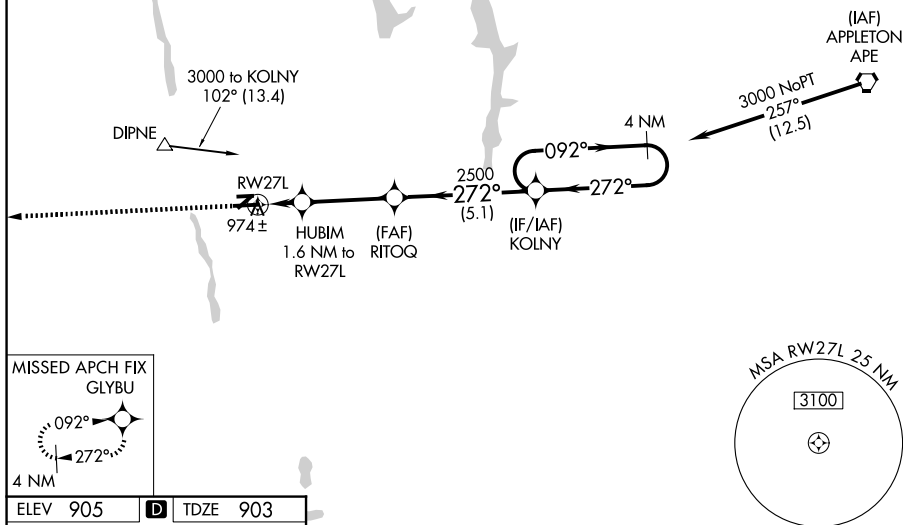

ELEV 905	D	TDZE 903
----------	----------	----------

[illegible]

REIL Rwy 27L
HIRL Rwy 9R-27L
MIRL Rwy 9L-27R

COLUMBUS, OHIO

Orig-C 09SEP21

OHIO STATE UNIVERSITY (OSU)

40°05'N - 83°04'W

RNAV (GPS) RWY 27L