

WAAS CH 81914 W26B	APP CRS 259°	Rwy Ldg 7005 TDZE 462 Apt Elev 463
--	------------------------	---

RNAV (GPS) RWY 26L
SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.

⚠ Baro-VNAV and VDP NA when using St Louis Lambert Intl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. For inop ALS when using St Louis Lambert Intl altimeter setting, increase LNAV/VNAV all Cats visibility to 1 3/8 SM and LNAV Cat C and D to 1 3/8 SM. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting: increase LPV DA to 705 feet; increase LNAV/VNAV DA to 959 feet and all visibilities to RVR 5000; increase all MDAs 60 feet and LNAV visibility Cat C/D to RVR 5500 and Circling visibility Cat C 1/4 SM.


MALSR



MISSED APPROACH.
Climb to 3000 direct
JOBK and hold.



*RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using St Louis Lambert Intl altimeter setting).

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER ★ 124.75 (CTAF) 0 257.2	GND CON 121.7	UNICOM 122.95
----------------------	---	--	-------------------------	-------------------------

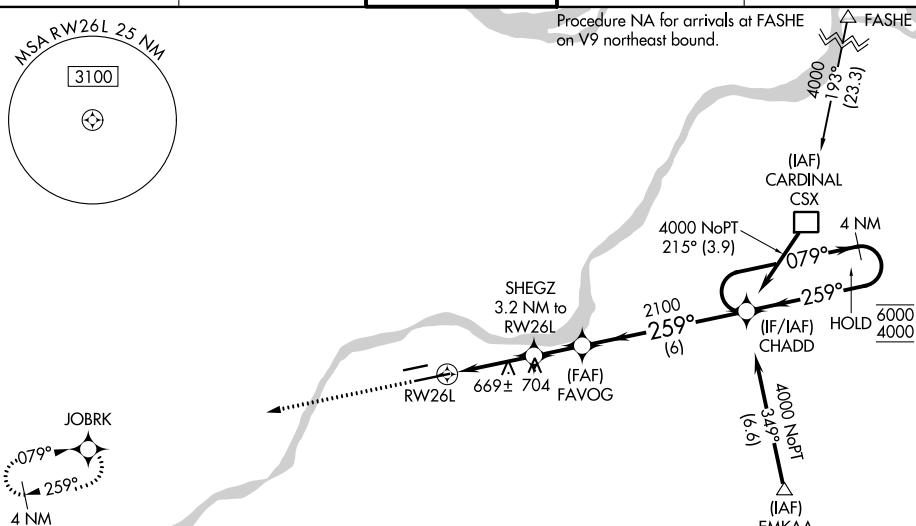

Procedure NA for arrivals at EMKAA on V88 southwest bound.

ELEV 463	D	TDZE 462
----------	----------	----------

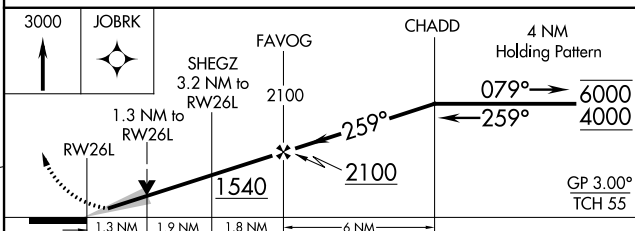

CATEGORY	A	B	C	D
LPV DA*	662/24 200 (200-½)			
RNAV/ VNAV DA	916/45 454 (500-¾)			
RNAV MDA	920/24 458 (500-½)		920/45 458 (500-¾)	
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	1180-2 717 (800-2)	1360-3 897 (900-3)

ST. LOUIS, MISSOURI

Amdt 1A 25JAN24

38°40'N-90°39'W

SPIRIT OF ST LOUIS (SUS)

RNAV (GPS) RWY 26L