

WAAS CH 97414 W26A	APP CRS 259°	Rwy Ldg TDZE 463 Apt Elev 463
--	------------------------	---

RNAV (GPS) RWY 26R


SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using STL altimeter setting. Rwy 26R helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. When local altimeter setting not received, use STL altimeter setting: increase LPV DA to 798 feet, increase LNAV/VNAV DA to 823 feet; increase all MDAs 60 feet.

MISSED APPROACH: Climb to 3000 direct EXESS and hold.

ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER ★ 124.75 (CTAF) 0 257.2	GND CON 121.7	UNICOM 122.95
----------------------	---	---	-------------------------	-------------------------

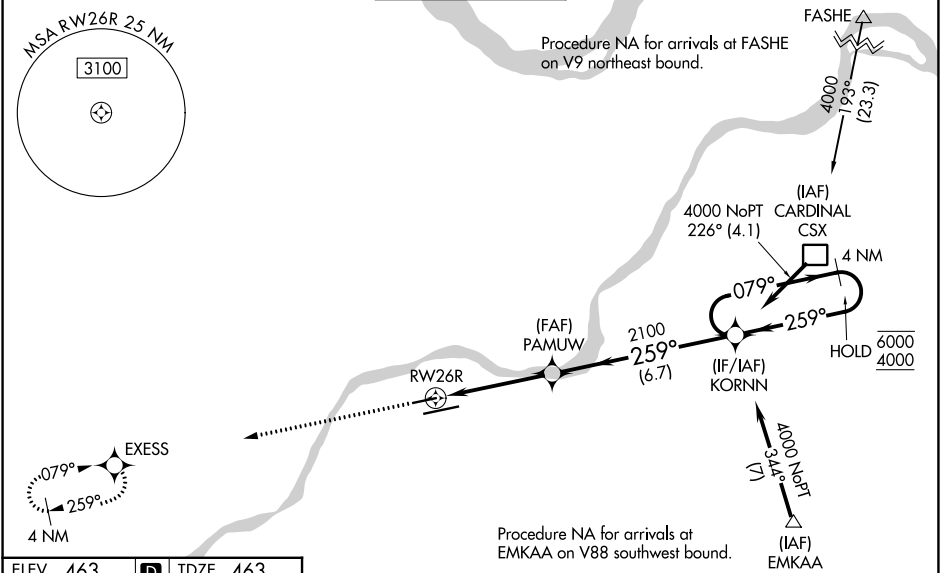

ELEV **463** **D** TDZE **463**

MIRL Rwy 8L-26R **1**
HRL Rwy 8R-26L **1**

3000 EXESS		KORNN 4 NM Holding Pattern			
		GP 3.50° TCH 47			
PAMUW 2100		1.2 NM 1.2 NM to RW26R 3.1 NM 6.7 NM			
CATEGORY	A	B	C	D	
LPV DA	755-1	292 (300-1)	NA		
LNAV/VNAV DA	780-1	317 (400-1)	NA		
LNAV MDA	940-1	477 (500-1)	NA		
CIRCLING	1100-1 637 (700-1)	1140-1 677 (700-1)	NA		

NC-3, 06 AUG 2026 to 03 SEP 2026

NC-3, 06 AUG 2026 to 03 SEP 2026