
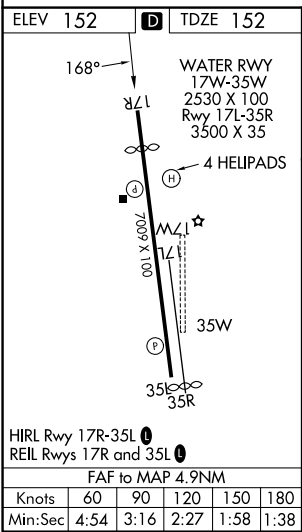


LOC/DME I-HEW 110.5 Chan 42	APP CRS 168°	Rwy Ldg TDZE 152 Apt Elev 152
---	------------------------	---

LOC Rwy 17R
DAVID WAYNE HOOKS MEML (DWH)

RADAR required for procedure entry.		MISSED APPROACH: Climb to 1200 then climbing right turn to 2000 on heading 325° and IAH VORTAC R-293 to TNV VOR/DME and hold.
▽ NA	When local altimeter setting not received, use George Bush Intcnl/Houston altimeter setting and increase all MDA 40 feet; increase S-LOC 17R Cts C/D visibility ½ mile. Circling NA to Rwys 17W and 35W. Rwy 17R helicopter visibility reduction below ¾ SM NA. Circling Rwy 35R NA at night.	

ATIS 128.375	HOUSTON APP CON 119.7 281.4	HOOKS TOWER★ 127.4 354.1 (E) 118.4 (CTAF) 354.1 (W)	GND CON 121.8 239.0	UNICOM 122.95
------------------------	---------------------------------------	---	-------------------------------	-------------------------

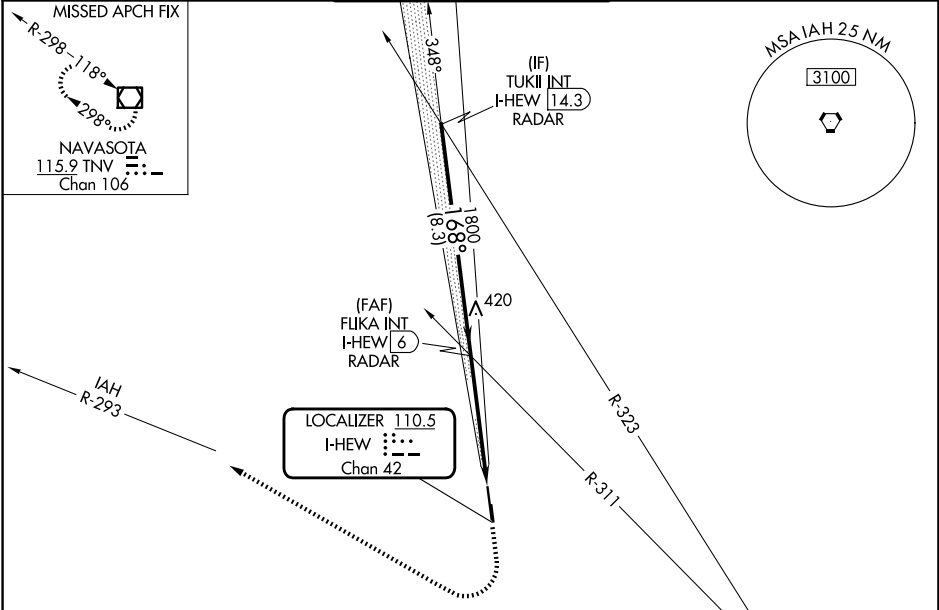

Visual Segment - Obstacles.		1200	2000	IAH R-293	TNV
		↑	hdg 325°		
TUKII INT I-HEW 14.3 RADAR		2000	168°	FLIKA INT I-HEW 6 RADAR	
		1800		I-HEW 1.1	
		8.3 NM	4.9 NM		
CATEGORY	A	B	C	D	
S-LOC 17R	640-1	488 (500-1)	640-1 3/8	488 (500-1 3/8)	
CIRCLING	640-1 488 (500-1)	660-1 508 (600-1)	680-1 1/2 528 (600-1 1/2)	780-2 628 (700-2)	