

WAAS CH 40234 W17A	APP CRS 175°	Rwy Ldg TDZE 27 Apt Elev 28
--	------------------------	---

RNAV (GPS) RWY 17
ORMOND BEACH MUNI (OMN)


RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.


Baro-VNAV and VDP NA when using DAB altimeter setting. Rwy 17 helicopter visibility reduction below 3/4 SM NA. When local altimeter setting not received, use DAB altimeter setting: increase LPV DA to 321 feet; increase LNAV/VNAV DA to 316 feet; increase all MDAs 20 feet.

MISSED APPROACH: Climb to 600 then climbing right turn to 2800 direct FLYHI and hold, continue climb-in-hold to 2800.

ATIS 118.475	DAYTONA APP CON 125.8 269.075	ORMOND BEACH TOWER ★ 119.075 (CTAF) 0	GND CON 121.625	UNICOM 123.05
------------------------	---	---	---------------------------	-------------------------

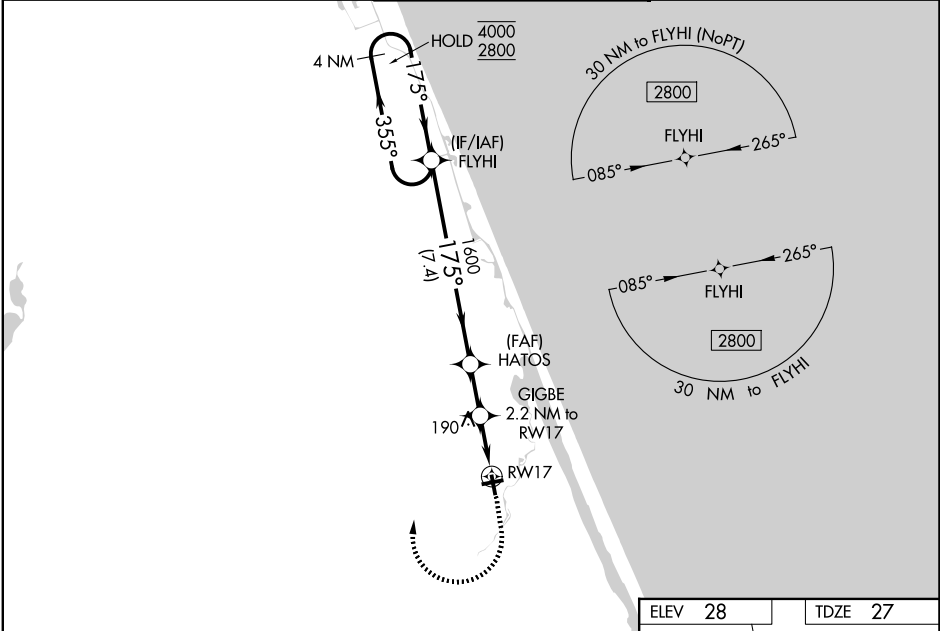

VGSI and RNAV glidepath not coincident (VGSI Angle 3.50/TCH 51).				
4 NM Holding Pattern FLYHI				
GP 3.50° TCH 60				
HATOS 1600 900 2.2 NM to RW17 1.1 NM to RW17				
7.4 NM 1.9 NM 1.1 NM 1.1 NM				
CATEGORY	A	B	C	D
LPV DA	302-7/8	275 (300-7/8)		NA
LNAV/VNAV DA	297-7/8	270 (300-7/8)		NA
LNAV MDA	500-1	473 (500-1)	500-1 3/8 473 (500-1 3/8)	NA
CIRCLING	500-1	472 (500-1)	740-2 712 (800-2)	NA

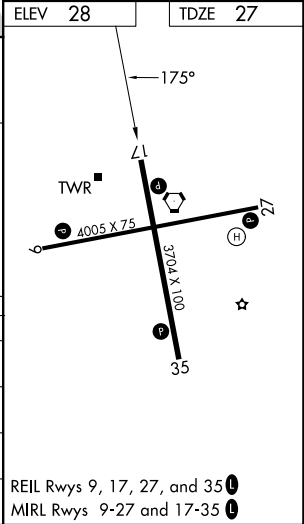

SE-3, 06 AUG 2026 to 03 SEP 2026

SE-3, 06 AUG 2026 to 03 SEP 2026