

WAAS CH 77826 W08A	APP CRS 087°	Rwy Ldg TDZE Apt Elev 9000 95 96
--	------------------------	--


RNAV (GPS) Z RWY 8L
GEORGE BUSH INTCNL/HOUSTON (IAH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop ALSF, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1¼, and LNAV Cat C/D/E visibility to 1¾. Simultaneous approach authorized with Rwy 8R and Rwy 9. DME/DME RNP-0.3 NA. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

ALSF-2

MISSED APPROACH: Climb to 580 then climbing left turn to 4000 direct CLEEP and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 E 124.35 316.15 W	HOUSTON TOWER 120.72 290.2	GND CON 118.575
-------------------------	--	--------------------------------------	---------------------------

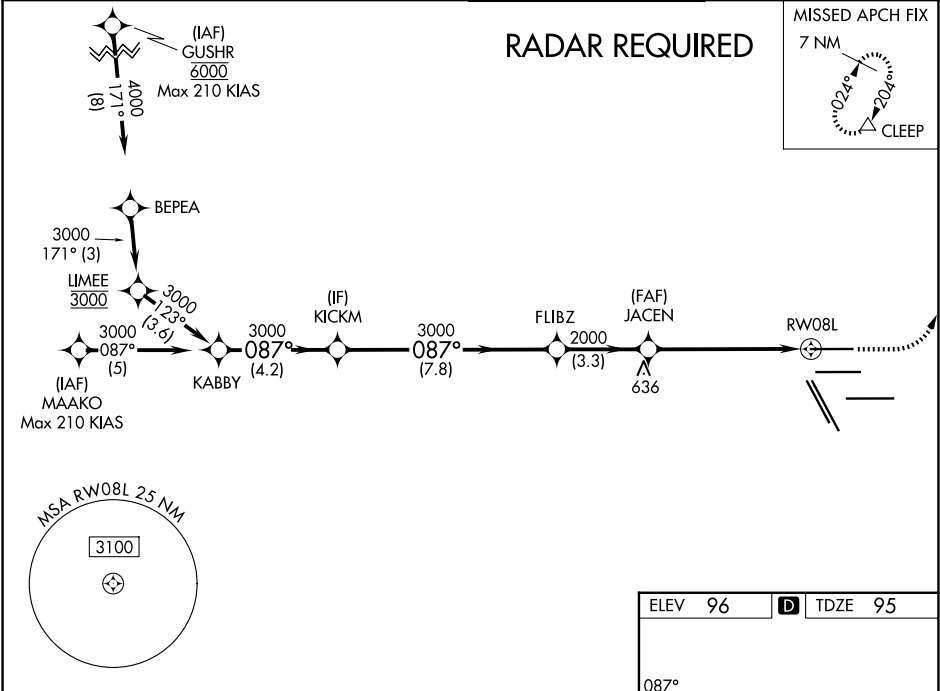

KABBYY		KICKM	FLIBZ	JACEN	RW08L
3000		3000	3000	2000	580
GP 3.00° TCH 59					4000
4.2 NM		7.8 NM	3.3 NM	4.5 NM	1.3 NM
CATEGORY	A	B	C	D	E
LPV DA	295/18		200 (200-½)		
LNAV/VNAV DA	486/40		391 (400-¾)		
LNAV MDA	580/24	485 (500-½)		580/50	485 (500-1)

ELEV 96 TDZE 95

087° 9000 X 150 26R 26L 10000 X 150 27 33L 33R TWR

TDZ/CL Rwy 8R, 8L, 15R, 26R, 26L, 27 and 33L
HIRL all Rwy's

SC-5, 06 AUG 2026 to 03 SEP 2026

SC-5, 06 AUG 2026 to 03 SEP 2026