

WAAS CH 72926 W09A	APP CRS 087°	Rwy Ldg 10000 TDZE 91 Apt Elev 96
--	------------------------	--

RNAV (GPS) Z RWY 9

GEORGE BUSH INTCNL/HOUSTON (IAH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop MALSR, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV Cat E visibility to 1 mile, and LNAV Cat C/D/E visibility to 1½ mile. Simultaneous approach authorized with Rwys 8L/R. DME/DME RNP-0.3 NA. LNAV procedure NA during simultaneous operations. Use of FD or AP providing RNP track guidance required during simultaneous operations.
 ** RVR 1800 authorized with use of FD or AP or HUD to DA.


MALSR



MISSED APPROACH: Climb to 580 then climbing right turn to 3000 direct JEB0X and hold.

D-ATIS 124.05	HOUSTON APP CON 120.05 379.1 E 124.35 316.15 W	HOUSTON TOWER 135.15 290.2	GND CON 118.575
-------------------------	--	--------------------------------------	---------------------------

RADAR REQUIRED

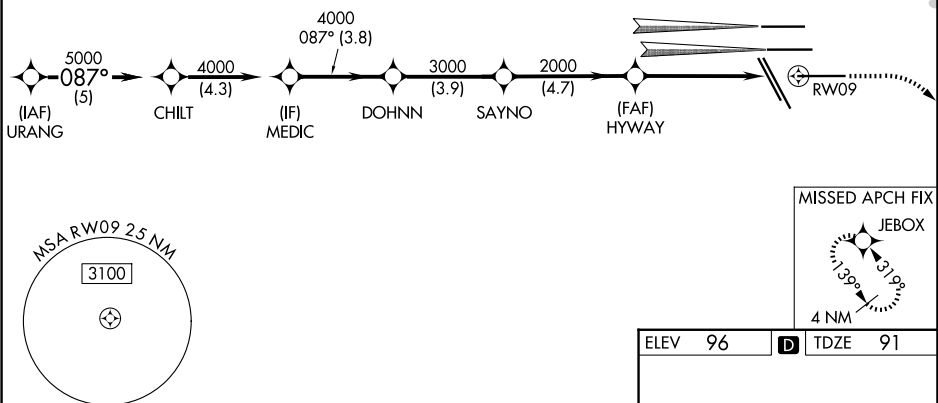

SC-5, 06 AUG 2026 to 03 SEP 2026

