

WAAS CH 57913 W33A	APP CRS 330°	Rwy Ldg TDZE 831 Apt Elev 833
--	------------------------	---

RNAV (GPS) RWY 33

LAWRENCE RGNL (LWC)

RNP APCH - GPS.


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Baro-VNAV and VDP NA when using TOP altimeter setting. When local altimeter setting not received, use TOP altimeter setting and increase LPV DA to 1083 feet, increase LNAV/VNAV DA to 1252 feet and all visibilities ¼ SM; increase all MDAs 60 feet and LNAV and Circling visibility Cat C ¼ SM.

MALSR

AS

MISSED APPROACH: Climb to 2700 direct RIBCO and hold.

ASOS 121.225	KANSAS CITY CENTER 123.8 343.7	UNICOM 123.0 (CTAF) 0
------------------------	--	---------------------------------

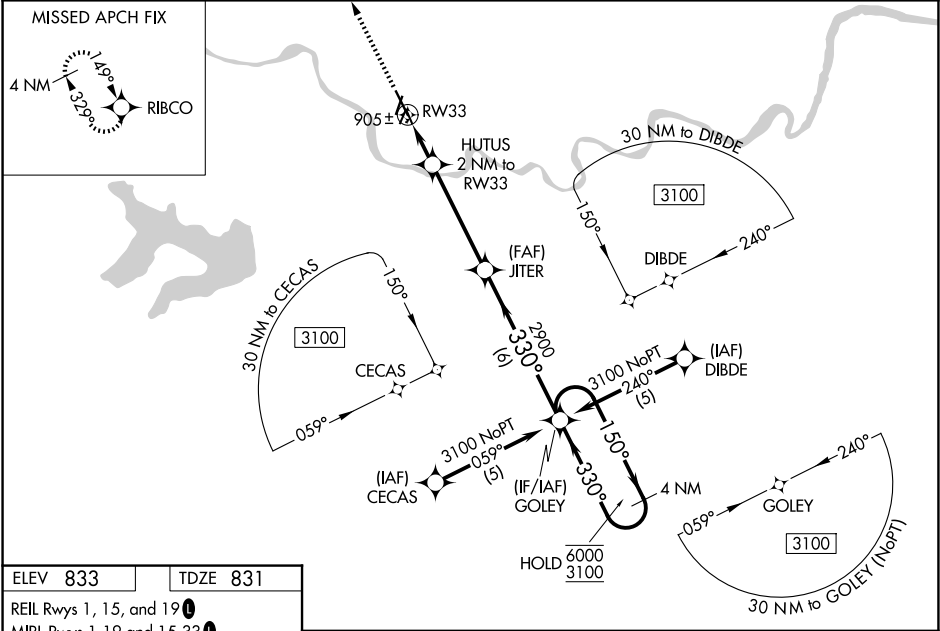

2700 RIBCO HUTUS 2 NM to RW33 1.1 NM to RW33 RW33 1.1 NM 0.9 4.2 NM 6 NM GOLEY 4 NM Holding Pattern 1520 2900 330° 150° 330° 6000 3100 GP 3.00° TCH 55	CATEGORY	A	B	C	D
	LPV DA	1031-¾	200 (200-¾)		NA
	LNAV/VNAV DA	1200-¾	369 (400-¾)		NA
	LNAV MDA	1220-¾	389 (400-¾)		NA
	CIRCLING	1420-1 587 (600-1)	1480-1 647 (700-1)	1620-2¼ 787 (800-2¼)	NA