
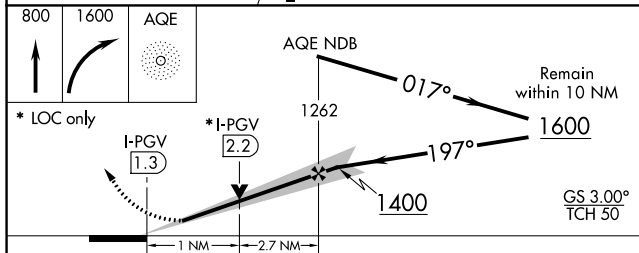


LOC/DME I-PGV <u>110.7</u> Chan 44	APP CRS 197°	Rwy Ldg 6505 TDZE 25 Apt Elev 26
--	------------------------	---

ILS Z or LOC Z RWY 20
PITT-GREENVILLE (PGV)

	ADF required. VDP NA with Washington altimeter setting. When local altimeter setting not received use Washington altimeter setting and increase S-ILS 20 DA to 298 feet; increase all MDAs 60 feet and S-LOC 20 visibility Cat C/D $\frac{1}{8}$ SM, and Circling visibility Cat D $\frac{1}{4}$ SM. For inop ALS when using Washington altimeter setting, increase S-ILS 20 all Cats visibility $\frac{3}{8}$ SM, and S-LOC 20 visibility Cat A/B $\frac{1}{4}$ SM. Inop table does not apply to S-ILS all Cats. Rwy 20 helicopter visibility reduction below $\frac{3}{4}$ SM NA. For inop ALS, increase S-LOC 20 visibility Cat A/B $\frac{1}{4}$ SM, Cat C/D $\frac{3}{8}$ SM.	MALS R 	MISSED APPROACH: Climb to 800 then climbing right turn to 1600 direct AQE NDB and hold.
--	--	---	--

AWOS-3PT 128.425	WASHINGTON CENTER 123.85 279.65	UNICOM 122.8 (CTAF) ①
----------------------------	---	---------------------------------

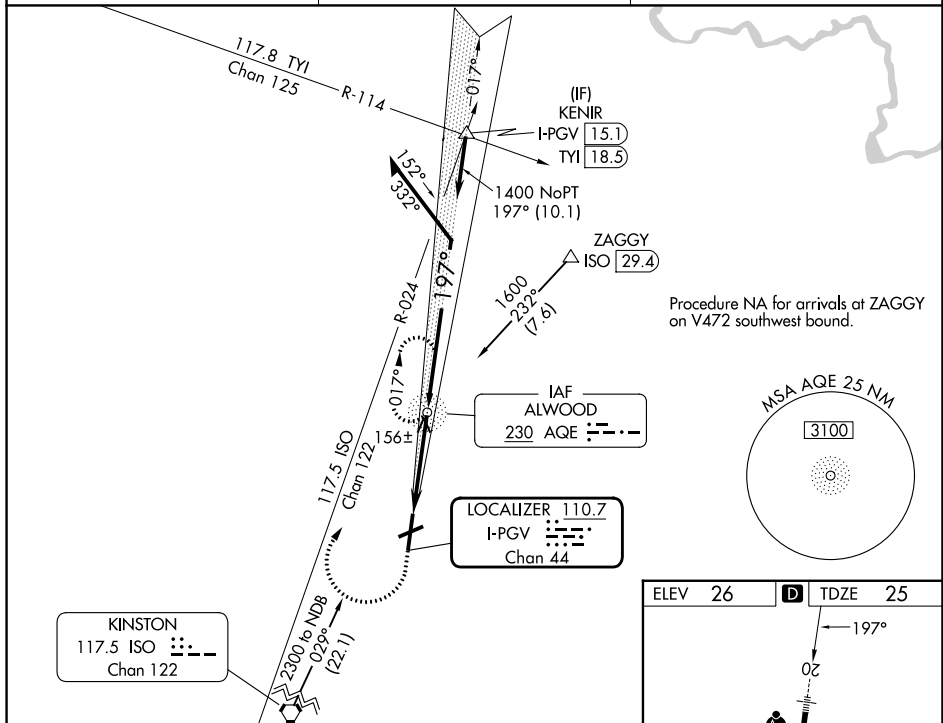

CATEGORY	A	B	C	D
S-ILS 20		257- ³ / ₄	231 (300- ³ / ₄)	
S-LOC 20		420- ³ / ₄	394 (400- ³ / ₄)	
CIRCLING	600-1 574 (600-1)	620-1 594 (600-1)	700-2 674 (700-2)	800-2 ¹ / ₂ 774 (800-2 ¹ / ₂)

