

WAAS CH 97731 W28A	APP CRS 283°	Rwy Ldg TDZE Apt Elev	5006 906 906
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 28

L O SIMENSTAD MUNI (OEO)

RNP APCH - GPS.


▼

⚠


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. VDP and Baro-VNAV NA when using Anoka County/Blaine (Janes Fld) altimeter setting. Rwy 28 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Anoka County/Blaine (Janes Fld) altimeter setting: increase LPV DA to 1163 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1236 feet and visibility all Cats ¼ SM; increase all MDAs 60 feet and visibility LNAV Cat C ¼ SM and Circling Cat C ¼ SM. Circling NA to Rwy's 4 and 22.

MISSED APPROACH:
Climb to 3000 direct
WESUS and hold.

AWOS-3 119.925	MINNEAPOLIS APP CON 121.2 335.65	GCO 121.725	CTAF 122.9
--------------------------	--	-----------------------	----------------------

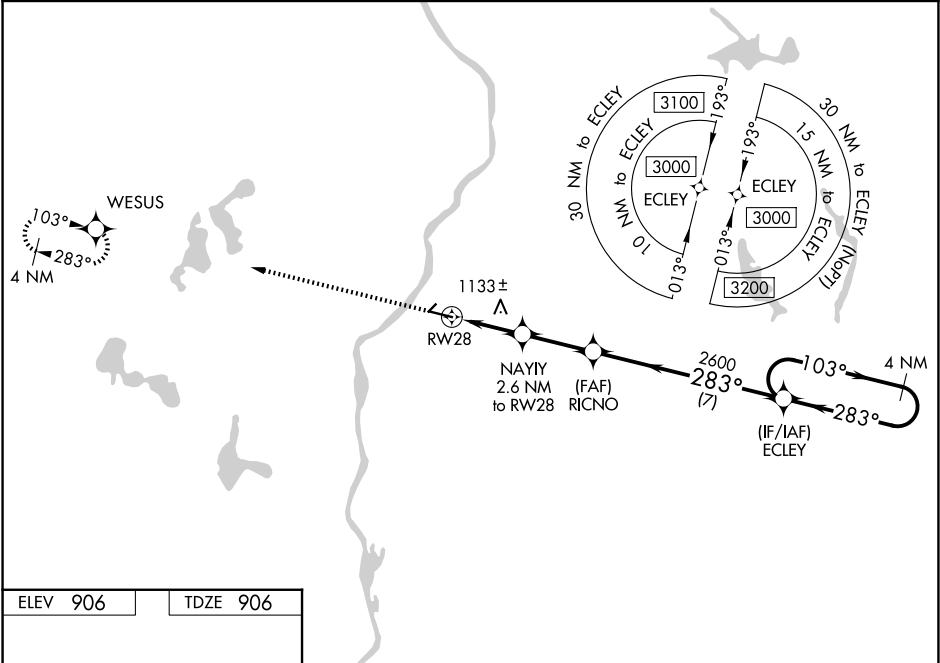

ELEV 906	TDZE 906
----------	----------

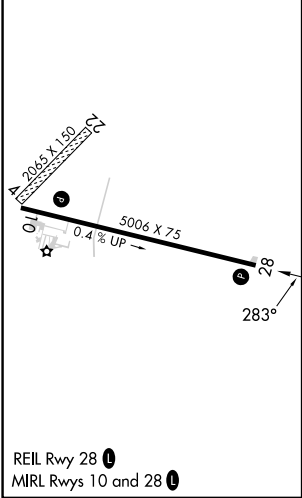

3000 WESUS

* LNAV only

NAYIY 2.6 NM to RW28

* 1.4 NM to RW28

RW28

1.4 NM

1.2

2.6 NM

7 NM

ECLECY

4 NM Holding Pattern

103°

283°

3000

GP 3.00°

TCH 37

CATEGORY	A	B	C	D
LPV DA	1106-¾	200 (200-¾)		NA
LNAV/VNAV DA	1179-⅞	273 (300-⅞)		NA
LNAV MDA	1400-1	494 (500-1)	1400-1⅜ 494 (500-1⅜)	NA
CIRCLING	1400-1 494 (500-1)	1500-1 594 (600-1)	1520-1¾ 614 (700-1¾)	NA