

WAAS CH 86311 W28A	APP CRS 282°	Rwy Ldg TDZE 911 Apt Elev 914
--	------------------------	---

RNAV (GPS) RWY 28

GENESEE COUNTY (G/VQ)

RNP APCH - GPS.

▼


▲

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. When local altimeter setting not received, use ROC altimeter setting: increase LPV DA to 1263 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 1466 feet and all visibilities ½ SM; increase all MDAs 120 feet and LNAV visibility Cat C ¾ SM and Circling visibility Cat C/D ½ SM. Baro-VNAV and VDP NA when using ROC altimeter setting. Inop table does not apply to LNAV Cat D. For inop ALS, increase LNAV Cat C visibility to 1 SM.

MALSR

MISSED APPROACH: Climb to 3300 direct WAVRU and leftturn via 162° track to YAVUD and left turn via 063° track to POCZI and hold.

AWOS-3PT 127.525	ROCHESTER APP CON 123.7 322.3	CLNC DEL 121.8	UNICOM 122.7 (CTAF) 1
----------------------------	---	--------------------------	--

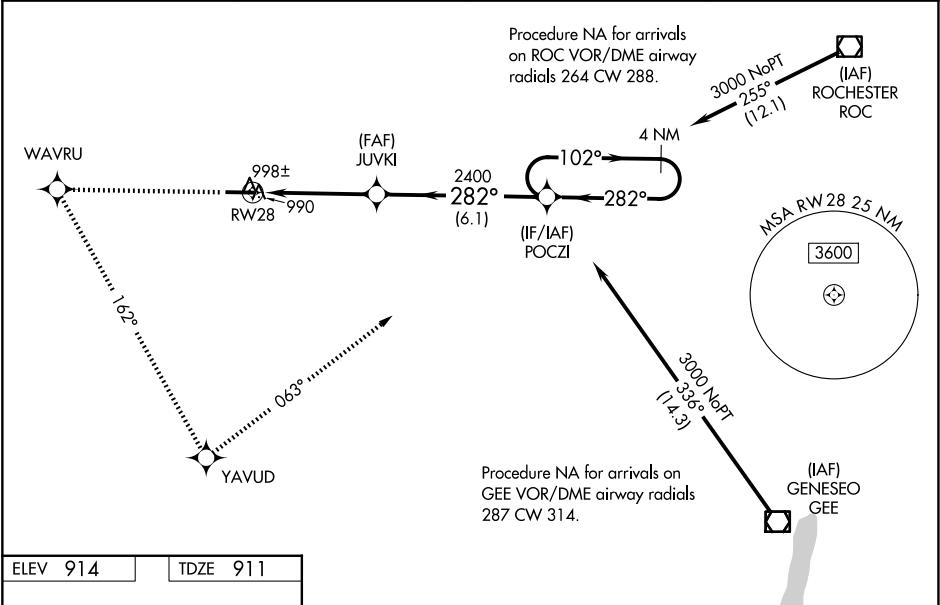

ELEV 914

TDZE 911

REIL Rwy 10 **1**

HIRL Rwy 10-28 **1**

3300	WAVRU	YAVUD	POCZI	4 NM Holding Pattern
↑	tr 162°	tr 063°		
0.9 NM to RW28				
0.9 3.5 NM 6.1 NM				
CATEGORY	A	B	C	D
LPV DA	1161-1½ 250 (300-½)			
LNAV/VNAV DA	1364-1 453 (500-1)			
LNAV MDA	1260-½ 349 (400-½)	1260-⅝ 349 (400-⅝)	1260-1 349 (400-1)	
CIRCLING	1380-1 466 (500-1)	1720-2¼ 806 (900-2¼)	1720-2½ 806 (900-2½)	