


LOC I-PEK 110.3	APP CRS 257°	Rwy Ldg 10000 TDZE 27 Apt Elev 30	ILS Y or LOC Y RWY 26 JACKSONVILLE INTL (JAX)
---------------------------	------------------------	--	--

ADF required. RADAR required for procedure entry.	MALSR 	MISSED APPROACH: Climb to 3000 direct DINNS LOM and hold, continue climb-in-hold to 3000.
▼ For inop ALS, ZETRI Fix Minimums: increase S-LOC 26 Cats C/D visibility to RVR 5500.		

D-ATIS 125.85	JACKSONVILLE APP CON 119.0 269.9	JACKSONVILLE TOWER 118.3 317.7	GND CON 121.9 348.6
-------------------------	--	--	-------------------------------

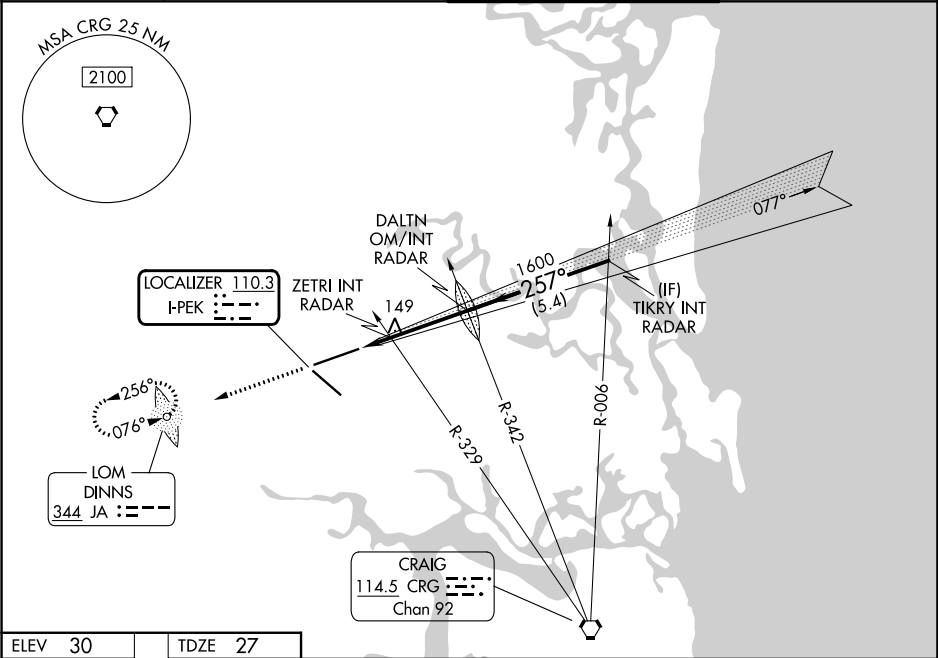

ELEV 30	TDZE 27
---------	---------

REIL Rwy 32
TDZL/RCLS Rwy 8, 14, and 26
HIRL Rwy 8-26 and 14-32

FAF to MAP 4.2 NM

Knots	60	90	120	150	180
Min:Sec	4:12	2:48	2:06	1:41	1:24

3000
↑

DINNS

VGSi and ILS glidepath not coincident (VGSi Angle 3.00/TCH 70).

DALTN OM/INT RADAR

TIKRY INT RADAR

ZETRI INT RADAR

1402

2000

257°

480

1600

GS 3.00°
TCH 55

→ 1.2 NM → 3 NM → 5.4 NM →

CATEGORY	A	B	C	D
S-ILS 26	227/18 200 (200-½)			
S-LOC 26	480/24 453 (500-½)	480/45	453 (500-¾)	
CIRCLING	520-1 490 (500-1)	580-1½ 550 (600-1½)	580-2 550 (600-2)	
ZETRI FIX MINIMUMS (DUAL VOR RECEIVERS REQUIRED)				
S-LOC 26	400/24 373 (400-½)	400/35 373 (400-¾)		
CIRCLING	520-1 490 (500-1)	580-1½ 550 (600-1½)	580-2 550 (600-2)	

SE-3, 06 AUG 2026 to 03 SEP 2026

SE-3, 06 AUG 2026 to 03 SEP 2026