

WAAS CH 86905 W04A	APP CRS 040°	Rwy Ldg TDZE 58 Apt Elev 72
--	------------------------	---

RNAV (GPS) RWY 4

EASTON/NEWNAM FLD (ESN)

RNP APCH - GPS.


▼

⚠

When local altimeter setting not received, use Cambridge altimeter setting; increase LPV DA to 303 feet, LNAV/VNAV DA to 670 feet and visibility ½ SM; increase all MDAs 60 feet and visibility LNAV Cat C/D and Circling Cat C ½ SM, and Circling Cat D ¼ SM. VDP and Baro-VNAV NA when using Cambridge altimeter setting. Circling Rwy 15, 33 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C.

MISSED APPROACH:
Climb to 700 then climbing right turn to 2000 direct ORETE and hold.

ATIS 124.475	POTOMAC APP CON 133.75 254.35	EASTON TOWER ★ 118.525 (CTAF) 0	GND CON 119.075
------------------------	---	--	---------------------------

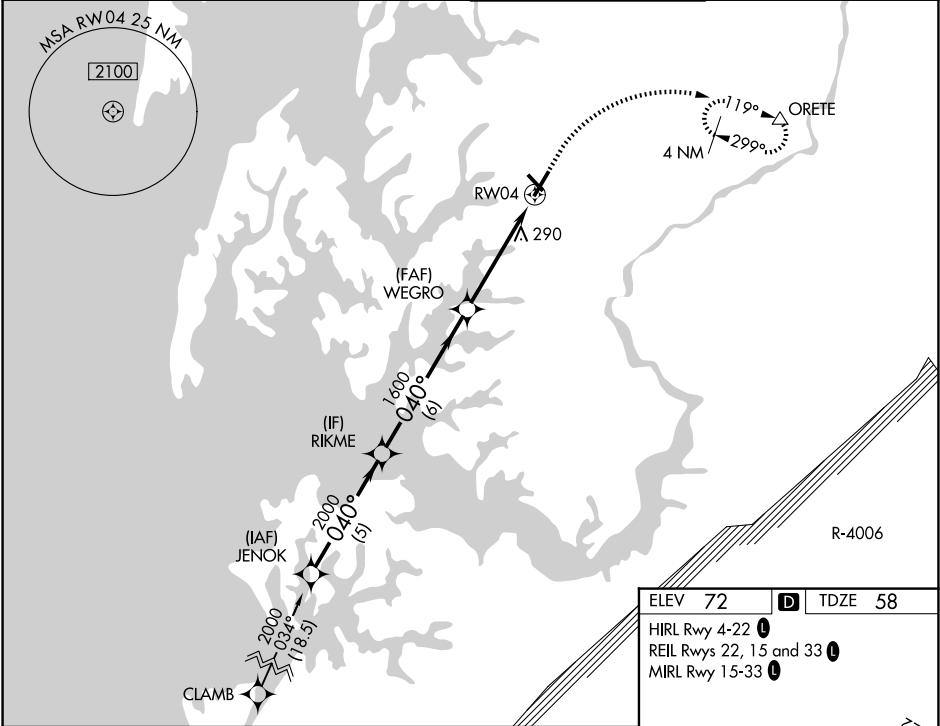

JENOK

RIKME

WEGRO

ORETE

2000

2000

1600

700

GP 3.00°

TCH 44

5 NM

6 NM

3.1 NM

1.6

040°

040°

040°

040°

2000

2000

1600

700

258-¾

200 (200-¾)

625-1½

567 (600-1½)

600-1

542 (600-1)

600-1½

542 (600-1½)

600-1

640-1

640-1½

740-2

528 (600-1)

568 (600-1)

568 (600-1½)

668 (700-2)

ELEV 72

TDZE 58

HIRL Rwy 4-22

REIL Rws 22, 15 and 33

MIRL Rwy 15-33

TWR

5300 X 100

4003 X 100

0.7% UP

0.5% UP

0.40°