AL-5607 (FAA)

RNAV (GPS) RWY 25
VIDALIA RGNL (VDI)

WAAS CH 69609 W25A	APP CRS 249°	Rwy Ldg 6002 TDZE 273 Apt Elev 274

RNP APCH - GPS.

Circling Rwy 32 NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C or above 54°C. For inop ALS, increase LNAV/VNAV all Cats visibility to 7/8 SM and LNAV Cat C/D to 1 3/8 SM.

MALSR

MISSED APPROACH: Climb to 2000 direct FEVKO and hold.

AWOS-3	JACKSONVILLE CENTER	UNICOM
119.925	127.575 269.025	122.8 (CTAF) L

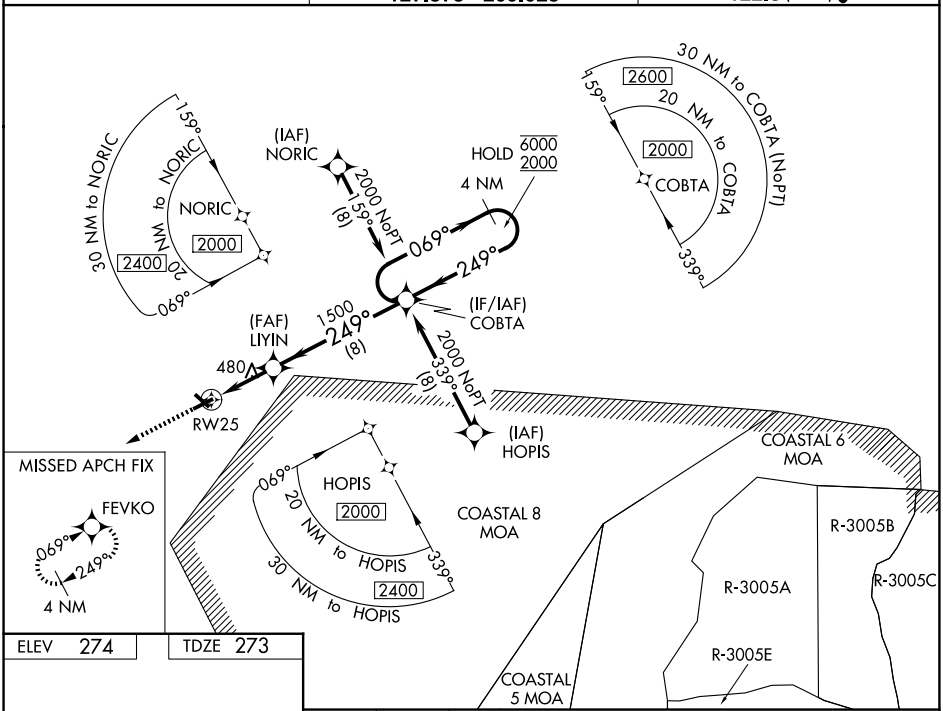

ELEV 274	TDZE 273

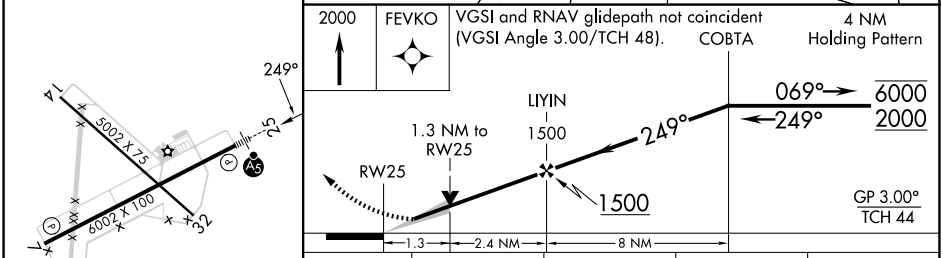

CATEGORY	A	B	C	D
LPV DA	473-½ 200 (200-½)			
LNAV/VNAV DA	584-½ 311 (400-½)			
LNAV MDA	740-½ 467 (500-½)		740-1 467 (500-1)	
CIRCLING	740-1 466 (500-1)		920-1¾ 646 (700-1¾)	1060-2½ 786 (800-2½)

HIRL Rwy 7-25 L
REIL Rwy 7 L