
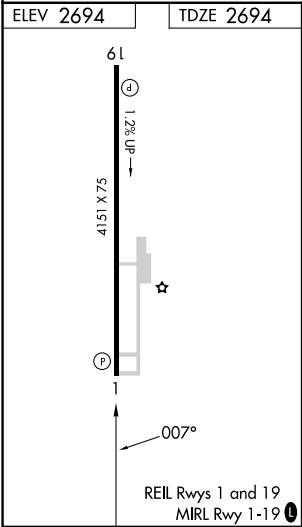


WAAS CH 69527 W01A	APP CRS 007°	Rwy Ldg TDZE 2694 Apt Elev 2694
--	------------------------	---

RNAV (GPS) RWY 1
TWIN COUNTY (HLX)

RNP APCH - GPS. ▼ Baro-VNAV NA when using PSK altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Rwy 1 helicopter visibility reduction below ¾ SM NA. VDP NA with PSK altimeter setting. When local altimeter setting not received, use PSK altimeter setting: increase LPV DA to 3103 feet and all visibilities ½ SM; increase LNAV/VNAV DA to 3154 feet and all visibilities ½ SM; increase all MDAs 140 feet and LNAV visibility Cats C and D ½ SM and Circling Cat C ¼ SM.	MISSED APPROACH: Climb to 3200 then climbing right turn to 5100 direct DOILY and hold, continue climb-in-hold to 5100.
--	--

AWOS-3 118.375	ROANOKE APP CON 126.0 339.8	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

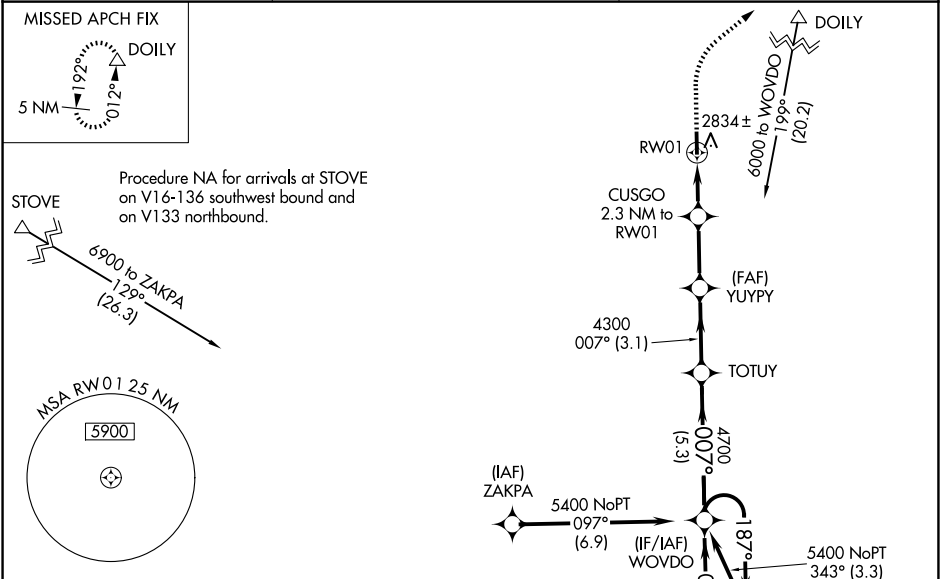

3200 ↑	5100 ↗	DOILY △	VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 21).				5 NM Holding Pattern		
CATEGORY		A		B		C		D	
LPV DA				2965-1		271 (300-1)			
LNAV/ VNAV DA				3016-1		322 (400-1)			
LNAV MDA		3100-1 406 (500-1)				3100-1½ 406 (500-1½)			
CIRCLING		3200-1 506 (600-1)				3200-1½ 506 (600-1½)		3680-3 986 (1000-3)	

NE-3, 06 AUG 2026 to 03 SEP 2026

NE-3, 06 AUG 2026 to 03 SEP 2026