

LOC/DME I-ASN	APP CRS	Rwy Ldg
109.95	038°	6032
Chan 36(Y)		TDZE
		511
		Apt Elev
		529

ILS Z or LOC Z RWY 4

TALLADEGA MUNI (ASN)


▼

▲NA

DME required. VDP NA with Anniston altimeter setting. When local altimeter setting not received, use Anniston altimeter setting and increase DA to 744 feet and all MDA 40 feet; increase S-LOC 4 Cat C/D ½ mile and Circling Cat C ¼ mile.

MISSED APPROACH: Climb to 1300 then climbing left turn to 3700 on heading 242° and on VUZ VORTAC R-095 to JOTAV INT/VUZ 30 DME and hold.

AWOS-3PT	BIRMINGHAM APP CON	UNICOM
118.425	132.15 285.45	122.8 (CTAF) 0

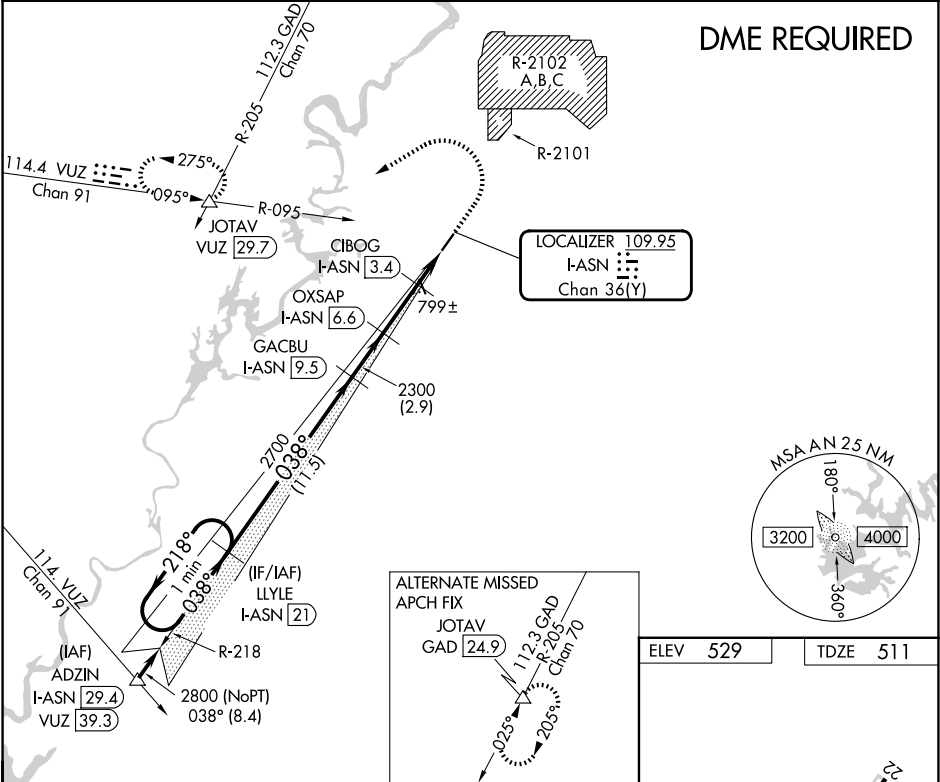

VGSI and ILS glidepath not coincident (VGSI Angle 3.00/TCH 65).

One Minute Holding Pattern

LLYLE I-ASN 21

GACBU I-ASN 9.5

OXSAP I-ASN 6.6

CIBOG I-ASN 3.4

VUZ R-095

JOTAV

2800

218°

038°

2700

2300

2300

1280

1.1

2.7

1300

3700

hdg 242°

*LOC only.

GS 3.00° TCH 45

11.5 NM

2.9

3.2 NM

0.8

1.5 NM

CATEGORY	A	B	C	D
S-ILS 4		711-¾	200 (200-¾)	
S-LOC 4	1060-1	549 (600-1)	1060-1½	549 (600-1½)
CIRCLING	1140-1 611 (700-1)	1180-1 651 (700-1)	1380-2½ 851 (900-2½)	1500-3 971 (1000-3)

