

WAAS CH 99424 W23A	APP CRS 230°	Rwy Ldg TDZE 847 Apt Elev 847
--	------------------------	---

RNAV (GPS) RWY 23

SHELBY-CLEVELAND COUNTY RGNL (EHO)

RNP APCH.


▼

▲

Baro-VNAV NA when using Charlotte altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 38°C. When local altimeter setting not received, use Charlotte altimeter setting and increase all DA 88 feet and all MDA 100 feet; increase LPV all Cats visibility ¼ SM and LNAV/VNAV all Cats, LNAV Cat C/D visibility ¼ SM.

MISSED APPROACH:
Climb to 3000 direct ZISUG and hold.

AWOS-3 118.425	CHARLOTTE APP CON 120.05 257.2	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

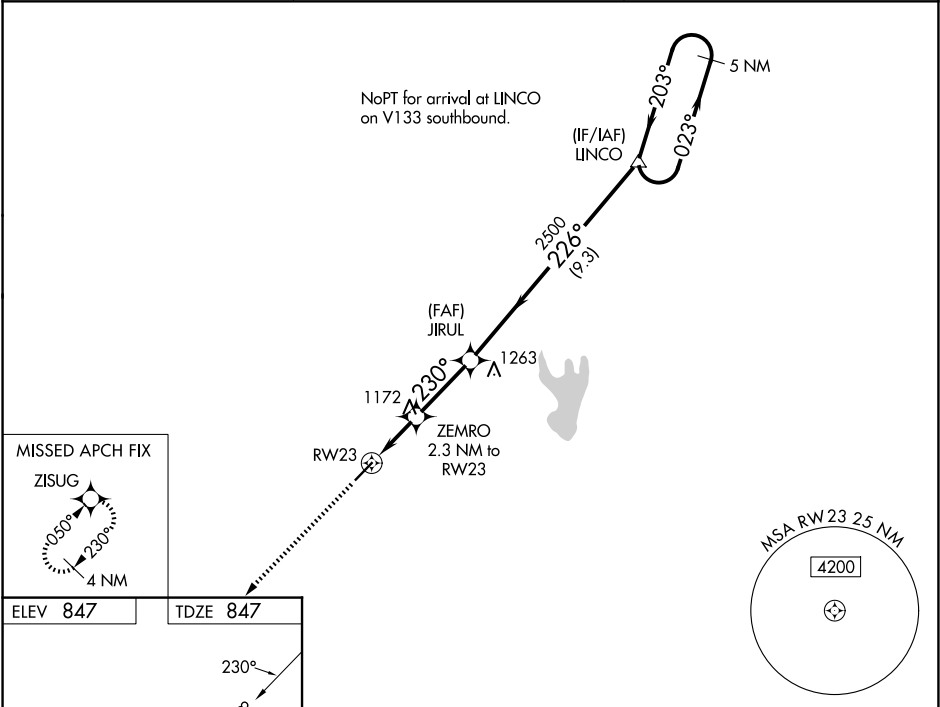

MIRL Rwy 5-23

3000 ZISUG 		VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 28).		5 NM Holding Pattern	
* LNAV only. RW23 		ZEMRO 2.3 NM to RW23	JIRUL 2500	LINCO	023° → ← 203° 4000
2.3 NM		2.8 NM	9.3 NM	GP 3.00° TCH 40	
CATEGORY	A	B	C	D	
LPV DA	1097-1 250 (300-1)				
LNAV/VNAV DA	1123-1 276 (300-1)				
LNAV MDA	1440-1 593 (600-1)		1440-1¾ 593 (600-1¾)		