
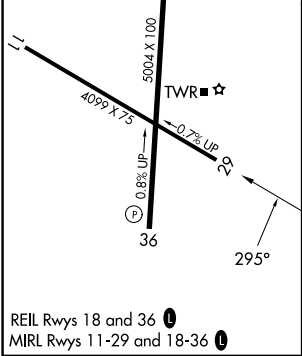


APP CRS	Rwy Ldg	4099
295°	TDZE	777
	Apt Elev	790

RNAV (GPS) RWY 29
GEORGETOWN EXEC (GTU)

RNP APCH.		MISSED APPROACH: Climbing right turn to 3000 direct DARTE and hold.	
▼ Rwy 29 helicopter visibility reduction below ¾ SM NA. VDP NA when using Skylark Field altimeter setting. When local altimeter setting not received, use Skylark Field altimeter setting and increase all MDA 80 feet increase LNAV and Circling Cat C/D visibility ¼ SM.			
ATIS 118.6	AUSTIN APP CON 119.0 370.85	GEORGETOWN TOWER ★ 120.225 (CTAF) 0	GND CON 119.125
		UNICOM 123.0	

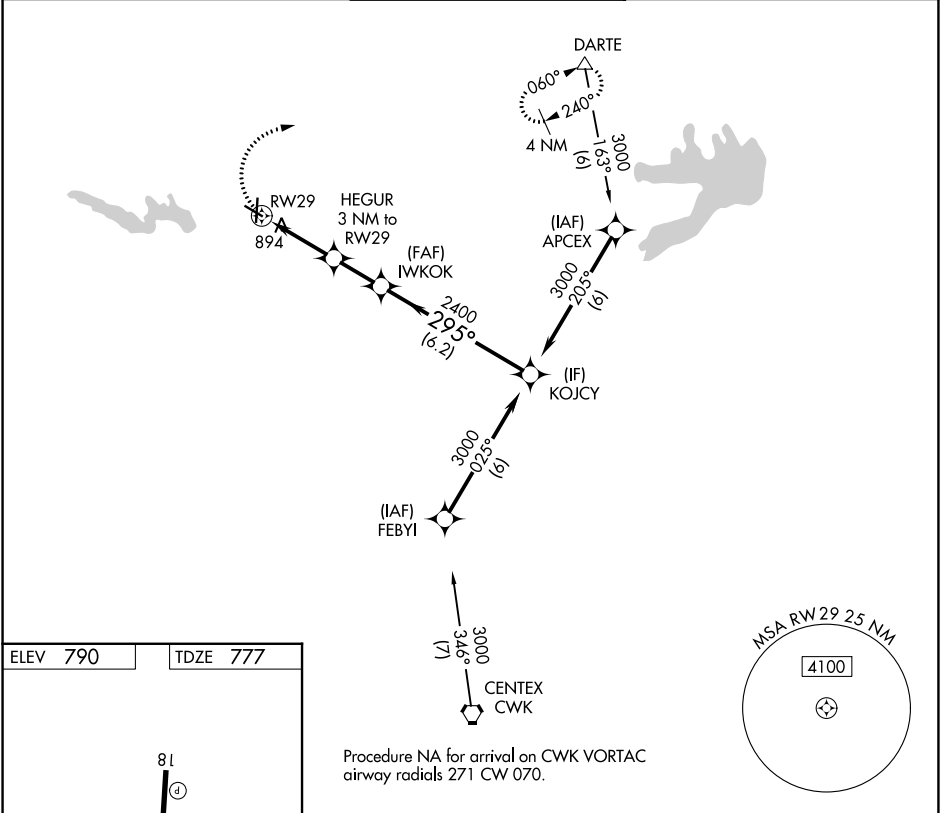

3000		DARTE		
		HEGUR 3 NM to RWY 29		
		1.2 NM to RWY 29		
		3.04° TCH 40		
		1760		
		2400		
		295°		
		3000		
		1.2	1.8	2 NM
		6.2 NM		
CATEGORY	A	B	C	D
LNAV MDA	1220-1	443 (500-1)	1220-1 3/8	443 (500-1 3/8)
CIRCLING	1240-1	1340-1	1360-1 1/2	1640-2 3/4
	450 (500-1)	550 (600-1)	570 (600-1 1/2)	850 (900-2 3/4)