WAAS CH 56513 W04A	APP CRS 042°	Rwy Ldg 7099 TDZE 158 Apt Elev 158

RNAV (GPS) RWY 4
ROCKY MOUNT/WILSON RGNL (RWI)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using GWW altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. When local altimeter setting not received, use GWW altimeter setting and increase LPV DA to 467 feet; increase LNAV/VNAV DA to 601 feet and all visibilities ¼ SM, increase all MDAs 60 feet and LNAV Cats C/D and Circling Cat C visibilities ¼ SM. For inop ALS, increase LNAV Cats C/D visibility to 1⅛ SM. For inop ALS when using GWW altimeter setting, increase LPV all Cats visibility to ⅞ SM.

MALSR

MISSED APPROACH: Climb to 2500 direct FENIM and hold.

ASOS	WASHINGTON CENTER	UNICOM
118.875	123.85 279.65	123.05 (CTAF) L

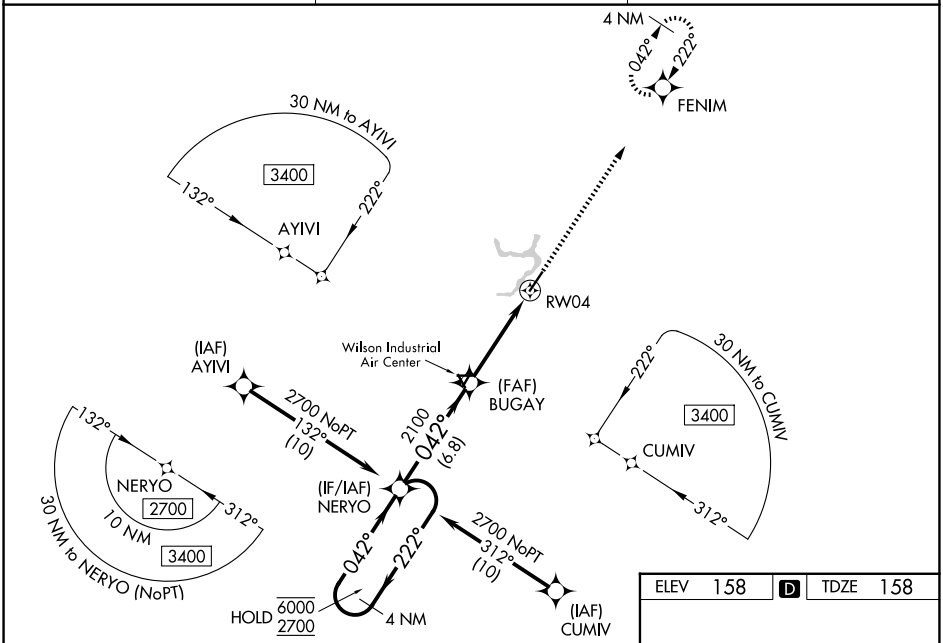

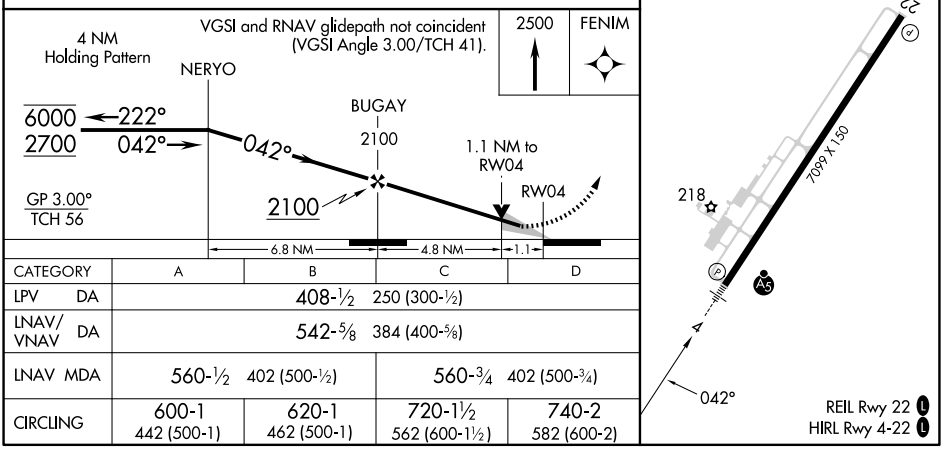

CATEGORY	A	B	C	D
LPV DA	408-½ 250 (300-½)			
LNAV/VNAV DA	542-⅝ 384 (400-⅝)			
LNAV MDA	560-½ 402 (500-½)		560-¾ 402 (500-¾)	
CIRCLING	600-1 442 (500-1)	620-1 462 (500-1)	720-1½ 562 (600-1½)	740-2 582 (600-2)

SE-2, 06 AUG 2026 to 03 SEP 2026

SE-2, 06 AUG 2026 to 03 SEP 2026