

WAAS CH 81926 W15A	APP CRS 149°	Rwy Ldg TDZE Apt Elev	5000 327 336
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 15

WARRENTON/FAUQUIER (HWY)


⚠

Baro-VNAV NA when using Culpeper altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -11°C (13°F) or above 41°C (105°F). DME/DME RNP-0.3 NA. Helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Culpeper altimeter setting: increase LPV DA to 549 feet; increase LNAV/VNAV DA to 607 feet and all visibilities ½ SM; increase all MDAs 40 feet and Circling Cat D visibility ¼ SM.

MISSED APPROACH:

Climb to 1800 then climbing right turn to 3000 direct CSN VORTAC and hold.

AWOS-3 120.35	POTOMAC APP CON 128.525 306.925	UNICOM 122.7 (CTAF) 0
-------------------------	---	---------------------------------

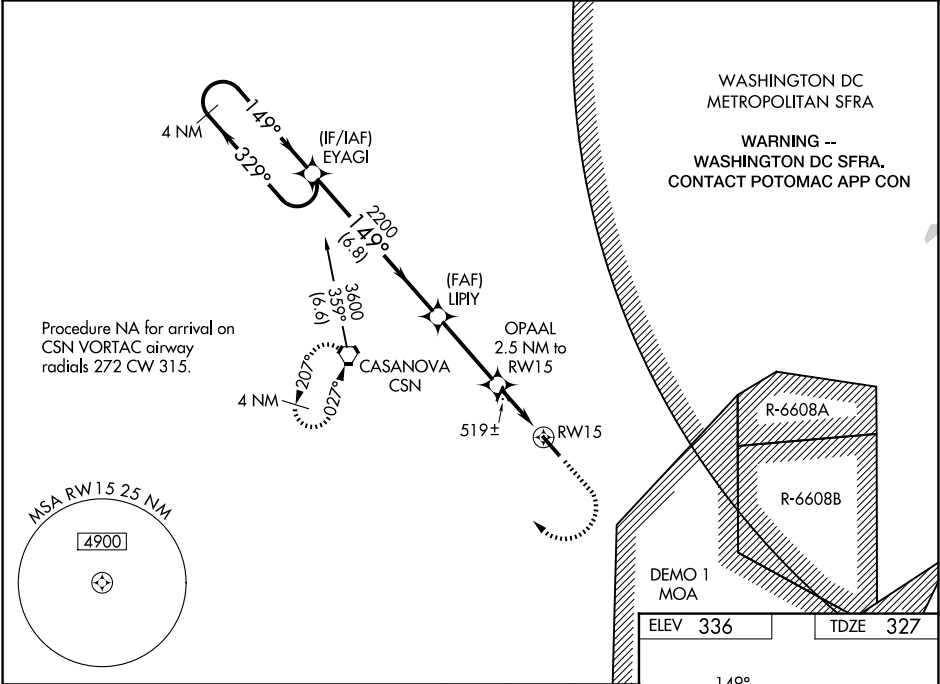

4 NM Holding Pattern

EYAGI

LIPIY

OPAAL

RW15

3600

329°

149°

2200

2200

1160

2.5 NM to RW15

1.3 NM to RW15

RW15

GP 3.00°

TCH 53

6.8 NM

3.3 NM

1.2 NM

1.3 NM


1800

3000

CSN

*LNAV only

CATEGORY	A	B	C	D
LPV DA		527-¾ 200 (200-¾)		
LNAV/VNAV DA		585-¾ 258 (300-¾)		
LNAV MDA	780-1 453 (500-1)		780-1¾ 453 (500-1¾)	
CIRCLING	780-1 444 (500-1)	800-1 464 (500-1)	880-1½ 544 (600-1½)	980-2 644 (700-2)

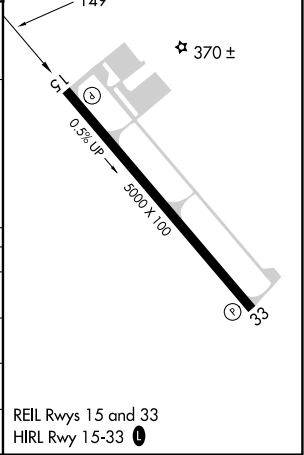

NE-3, 06 AUG 2026 to 03 SEP 2026

NE-3, 06 AUG 2026 to 03 SEP 2026