
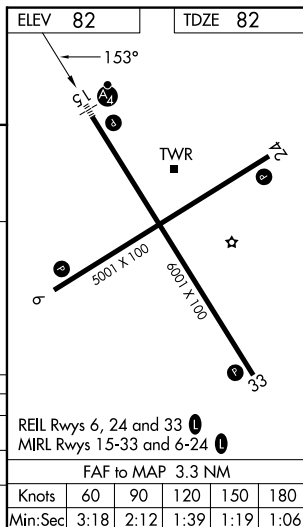
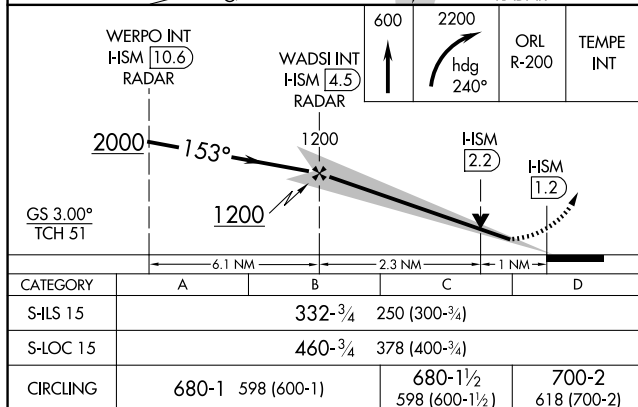


ILS or LOC RWY 15
KISSIMMEE GATEWAY (TSM)

T VDP NA when using MCO altimeter setting. When local altimeter setting not received, use MCO altimeter setting and increase S-LS 15 DA to 360 feet; increase all MDAs 40 feet and S-LOC 15 visibility Cat C/D $\frac{1}{4}$ SM, and Circling visibility Cat C $\frac{1}{4}$ SM. Inop table does not apply to ILS all Cats.

MISSED APPROACH: Climb to 600 then climbing right turn to 2200 on heading 240° and ORL VORTAC R-200 to TEMPE INT/ORL 28 DME and hold.

ATIS 128.775	ORLANDO APP CON 119.4 351.9	KISSIMMEE TOWER ★ 124.45 (CTAF) 0	GND CON 121.7	UNICOM 122.95
-----------------	--------------------------------	--------------------------------------	------------------	------------------

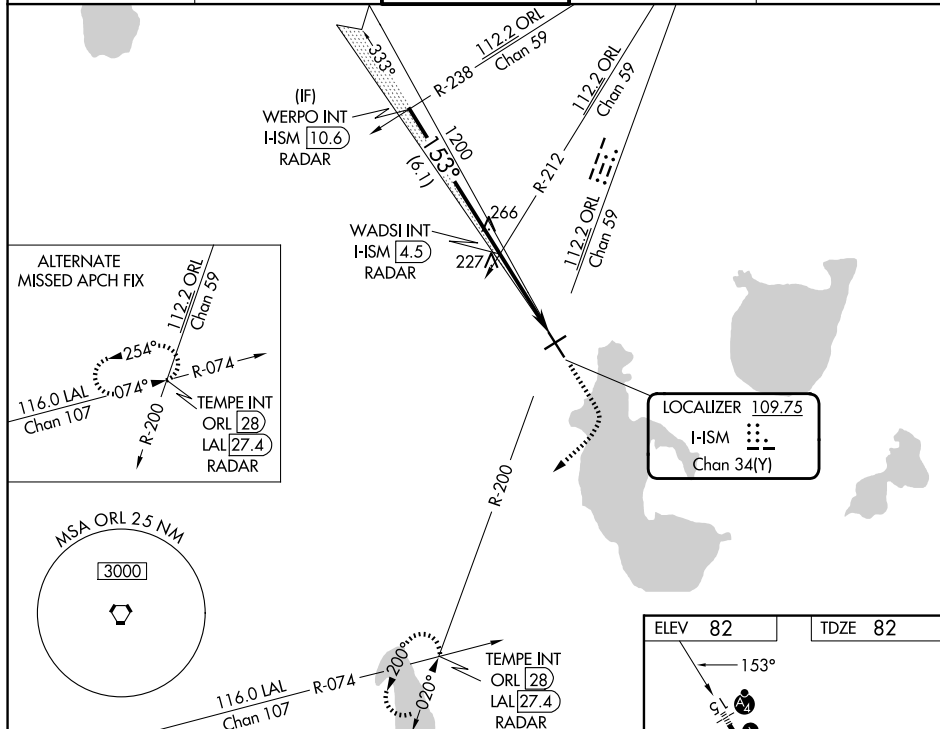

SE-3, 06 AUG 2026 to 03 SEP 2026