

|               |         |          |      |
|---------------|---------|----------|------|
| LOC/DME I-OAJ | APP CRS | Rwy Ldg  | 7100 |
| 108.7         | 052°    | TDZE     | 89   |
| Chan 24       |         | Apt Elev | 93   |

ILS or LOC RWY 5

ALBERT J ELLIS (OAJ)



VDP NA with Wilmington altimeter setting. When local altimeter setting not received, use Wilmington altimeter setting and increase all DA to 382 feet; increase all MDAs 100 feet and visibility S-LOC 5 Cats C/D 3/4 SM and Circling Cats C/D 1/4 SM; OGOYO fix minimums: increase visibility S-LOC 5 Cats C/D 3/4 SM and Circling Cats C/D 1/4 SM. For inoperative MALSR, increase S-LOC 5 Cats C/D visibility to 1 3/4 mile, increase OGOYO fix minimums S-LOC 5 Cats C/D visibility to 1 mile. For inoperative MALSR when using Wilmington altimeter setting, increase S-ILS 5 all Cats visibility to 3/4 mile, increase S-LOC 5 Cats C/D visibility to 1 3/4 mile, increase OGOYO fix minimums S-LOC 5 Cats C/D visibility to 1 3/4 mile. ADF required.

MALSR

MISSED APPROACH:  
Climb to 600 then climbing left turn to 2100 direct ELLAS LOM/I-OAJ 7.4 DME and hold.

|         |                      |                 |         |        |
|---------|----------------------|-----------------|---------|--------|
| ATIS    | WILMINGTON APP CON ★ | ELLIS TOWER ★   | GND CON | UNICOM |
| 124.475 | 135.75 317.425       | 132.65 (CTAF) 0 | 125.4   | 122.95 |

ADF or DME REQUIRED

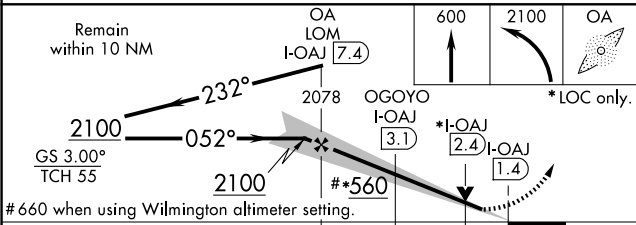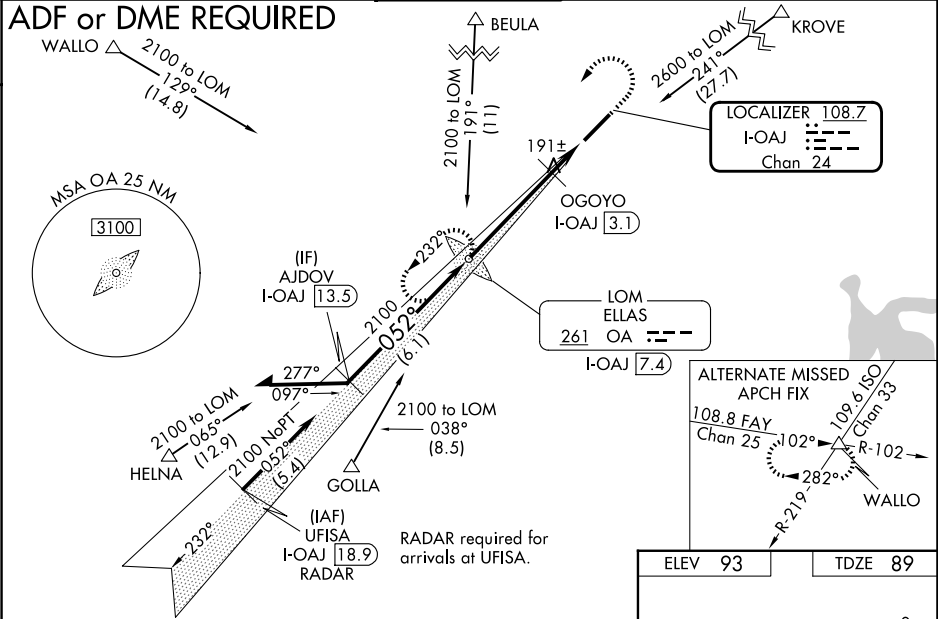

| CATEGORY                          | A                    | B                    | C                            | D                    |
|-----------------------------------|----------------------|----------------------|------------------------------|----------------------|
| S-ILS 5                           | 289-1/2              |                      | 200 (200-1/2)                |                      |
| S-LOC 5                           | 560-1/2              | 471 (500-1/2)        | 560-1                        | 471 (500-1)          |
| CIRCLING                          | 560-1                | 467 (500-1)          | 720-1 3/4<br>627 (700-1 3/4) | 720-2<br>627 (700-2) |
| OGOYO FIX MINIMUMS (DME REQUIRED) |                      |                      |                              |                      |
| S-LOC 5                           | 460-1/2              | 371 (400-1/2)        | 460-5/8                      | 371 (400-5/8)        |
| CIRCLING                          | 540-1<br>447 (500-1) | 560-1<br>467 (500-1) | 720-1 3/4<br>627 (700-1 3/4) | 720-2<br>627 (700-2) |

