


Baro-VNAV NA when using Wilmington altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. VDP NA with Wilmington altimeter setting. When local altimeter setting not received, use Wilmington altimeter setting and increase LPV DA to 387 feet and all visibilities ⅓ SM. Increase LNAV/VNAV DA to 591 feet; increase all MDAs 100 feet and LNAV visibility Cat C/D ⅓ SM, and Circling visibility Cat C/D ¼ SM.

MISSED APPROACH:
Climb to 2100 direct
CUVAL and hold.

ATIS 124.475	WILMINGTON APP CON ★ 135.75 317.425	ELLIS TOWER ★ 132.65 (CTAF) 0	GND CON 125.4	UNICOM 122.95
-----------------	--	----------------------------------	------------------	------------------

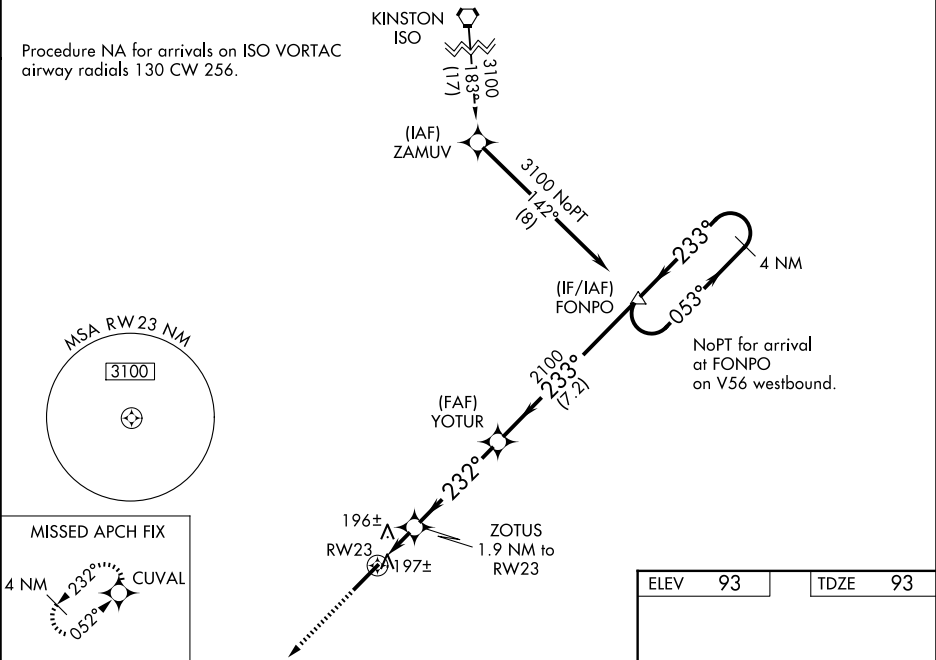

2100
↑

CUVAL
✧

*LNAV only.

CATEGORY	A	B	C	D
LPV DA	293-¾		200 (200-¾)	
LNAV/ VNAV DA	497-1⅓		404 (500-1⅓)	
LNAV MDA	460-1		367 (400-1)	
CIRCLING	540-1 447 (500-1)	560-1 467 (500-1)	720-1¾ 627 (700-1¾)	720-2 627 (700-2)

ELEV 93

TDZE 93

REIL Rwy 23 0
HIRL Rwy 5-23 0