

|                                        |                        |                             |                                         |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|
| WAAS<br>CH <b>78304</b><br><b>W21A</b> | APP CRS<br><b>206°</b> | Rwy Ldg<br>TDZE<br>Apt Elev | <b>5001</b><br><b>485</b><br><b>485</b> |
|----------------------------------------|------------------------|-----------------------------|-----------------------------------------|


RNAV (GPS) RWY 21  
ST CLAIR COUNTY (PLR)

**⚠**

DME/DME RNP-0.3 NA. When local altimeter setting not received, use Anniston altimeter setting and increase LPV DA to 799 feet and all Cats visibility to 1, increase LNAV/VNAV DA to 964 feet and all visibilities to 1½, increase all MDA 80 feet and LNAV Cat C/D to 1¼ and Circling Cat C to 2½ and Cat D to 3. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Anniston altimeter setting.

MISSED APPROACH:  
Climb to 4000 direct HANUR and hold, continue climb-in-hold to 4000.

|                           |                                          |                                  |                                  |
|---------------------------|------------------------------------------|----------------------------------|----------------------------------|
| AWOS-3P<br><b>119.625</b> | BIRMINGHAM APP CON<br><b>123.8 256.8</b> | CLNC DEL<br><b>121.725 (GCO)</b> | UNICOM<br><b>123.05 (CTAF) 0</b> |
|---------------------------|------------------------------------------|----------------------------------|----------------------------------|

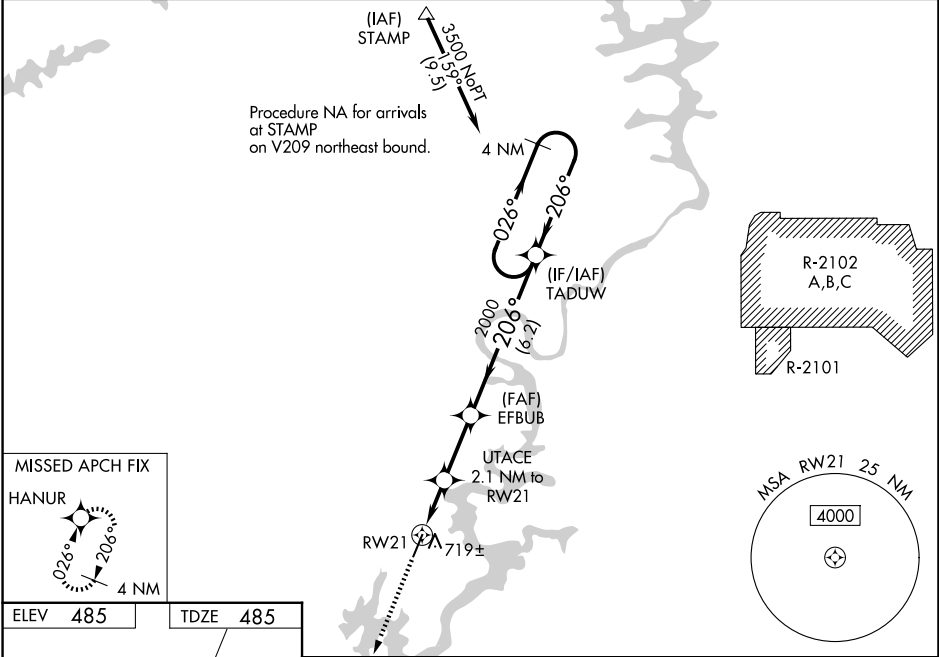

|              |          |                                                              |  |  |  |
|--------------|----------|--------------------------------------------------------------|--|--|--|
| ELEV 485     | TDZE 485 |                                                              |  |  |  |
| 4000 HANUR   |          | *LNAV only. UTACE 2.1 NM to RW21                             |  |  |  |
| RW21         |          | *1.4 NM to RW21                                              |  |  |  |
| 1.4 NM       |          | 0.7 NM                                                       |  |  |  |
| 2.5 NM       |          | 6.2 NM                                                       |  |  |  |
| CATEGORY     |          | A B C D                                                      |  |  |  |
| LPV DA       |          | 735-¾ 250 (300-¾)                                            |  |  |  |
| LNAV/VNAV DA |          | 900-1¾ 415 (500-1¾)                                          |  |  |  |
| LNAV MDA     |          | 980-1 495 (500-1) 980-1¾ 495 (500-1¾)                        |  |  |  |
| CIRCLING     |          | 1180-1 695 (700-1) 1240-2¼ 755 (800-2¼) 1340-2¾ 855 (900-2¾) |  |  |  |