

MAYNR THREE DEPARTURE (RNAV)
(MAYNR3.MAYNR) 31OCT24

**FORT LAUDERDALE, FLORIDA
FORT LAUDERDALE EXEC (FXXE)**

MIAMI DEP CON
126.05 251.1
ATIS
119.85
CLNC DEL
127.95
GND CON
121.75
EXECUTIVE TOWER
120.9 239.3

RNAV 1 - DME/DME/IRU or GPS.
From SLIPT to MAXIM: RNAV 1- GPS.
From SLIPT to CANOA: RNAV 1- GPS.
RADAR required for non-GPS equipped aircraft.
RADAR required.


**TOP ALTITUDE:
ASSIGNED BY ATC**



TAKEOFF MINIMUMS

Rwys 9, 13, 27, 31: Standard with minimum climb of 500'/NM to 520.

NOTE: Jet aircraft only.
NOTE: Accelerate to 250K until leaving
10000, if unable, advise ATC.

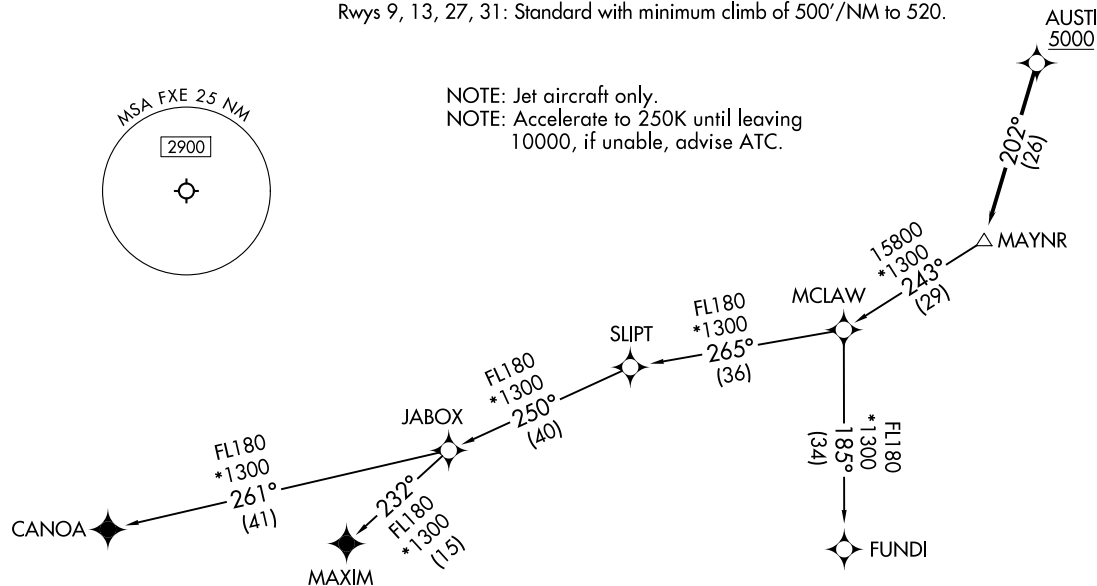

NOTE: Chart not to scale.

(COMPLETED ON FOLLOWING PAGE)

(MAYNR3.MAYNR) 24305
MAYNR THREE DEPARTURE (RNAV)
AL-5942 (FAA)

FORT LAUDERDALE EXEC (FXXE)
FORT LAUDERDALE, FLORIDA



DEPARTURE ROUTE DESCRIPTION

TAKEOFF RUNWAYS 9, 13, 27, 31: Climb on heading assigned by ATC for vectors to cross AUSTI at or above 5000, thence. . . .

. . . .on track 202° to MAYNR, then on assigned transition, maintain ATC assigned altitude. Expect clearance to filed altitude within 10 minutes after departure.

- CANOA TRANSITION (MAYNR3.CANOA)
- FUNDI TRANSITION (MAYNR3.FUNDI)
- MAXIM TRANSITION (MAYNR3.MAXIM)

SE-3, 06 AUG 2026 to 03 SEP 2026

SE-3, 06 AUG 2026 to 03 SEP 2026