

WAAS CH 50319 W27A	APP CRS 271°	Rwy Ldg TDZE 13 Apt Elev 13
--	------------------------	---


RNAV (GPS) RWY 27

FORT LAUDERDALE EXEC (FXXE)

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C (40°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Fort Lauderdale/Hollywood Intl altimeter setting and increase LPV DA to 414; LNAV/VNAV DA to 468. Increase all MDA 20 feet and increase LPV all Cats and LNAV Cats C/D visibility to 1 3⁄8. Baro-VNAV and VDP NA when using Fort Lauderdale/Hollywood Intl altimeter setting. Helicopter visibility reduction below 3⁄4 SM NA.

MISSED APPROACH:
Climb to 2000 direct
ENVER and hold.

ATIS 119.85	MIAMI APP CON 119.7 306.3	EXECUTIVE TOWER 120.9 239.3	GND CON 121.75
-----------------------	-------------------------------------	---------------------------------------	--------------------------

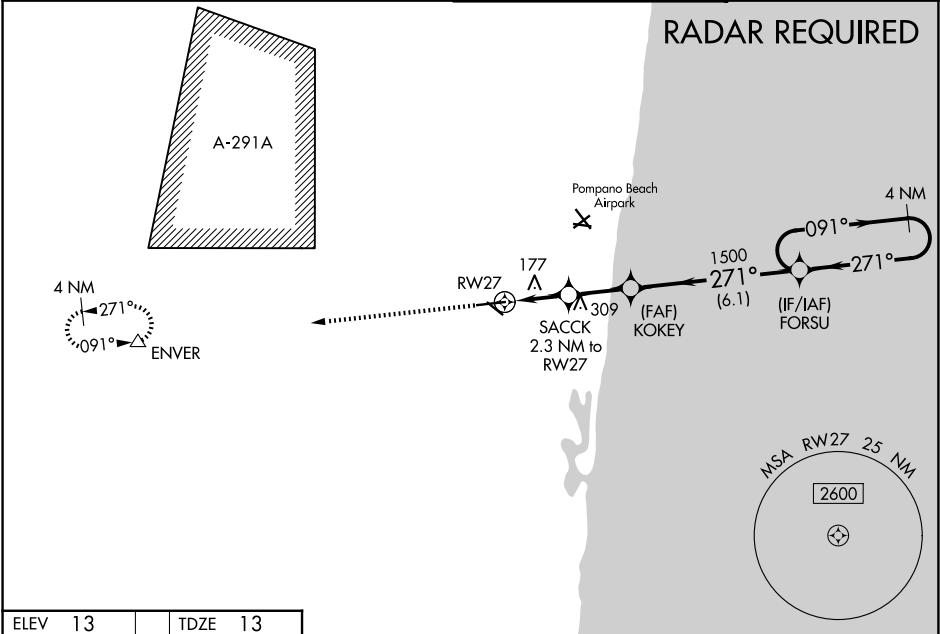

ELEV 13 TDZE 13

2000 ENVER
↑
△

VGSI and RNAV glidepath not coincident
(VGSI Angle 3.25/TCH 56).

*LNAV only

FORSU 4 NM Holding Pattern
2000
091°
271°

KOKEY 1500
271°
1500

SACCK 2.3 NM to RW27
1.1 NM to RW27
780*

RW27

GP 3.00°
TCH 45

CATEGORY	A	B	C	D
LPV DA	396-1¼ 383 (400-1¼)			
LNAV/VNAV DA	450-1½ 437 (500-1½)			
LNAV MDA	440-1 427 (500-1)		440-1¼ 427 (500-1¼)	
CIRCLING	520-1 507 (600-1)	620-1 607 (700-1)	780-2¼ 767 (800-2¼)	780-2½ 767 (800-2½)

FORT LAUDERDALE, FLORIDA
Amdt 2B 05FEB15

26°12'N-80°10'W

FORT LAUDERDALE EXEC (FXXE)

RNAV (GPS) RWY 27