

|                                        |                        |                                                             |
|----------------------------------------|------------------------|-------------------------------------------------------------|
| WAAS<br>CH <b>48919</b><br><b>W09A</b> | APP CRS<br><b>091°</b> | Rwy Ldg <b>6002</b><br>TDZE <b>13</b><br>Apt Elev <b>13</b> |
|----------------------------------------|------------------------|-------------------------------------------------------------|

RNAV (GPS) RWY 9  
FORT LAUDERDALE EXEC (FXE)


**T** For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 4°C (40°F) or above 54°C (130°F). When local altimeter setting not received, use Fort Lauderdale/Hollywood  
**A** Intl altimeter setting and increase LPV DA to 231; LNAV/VNAV DA to 445. Increase all MDA 20 feet, increase LNAV/VNAV all Cats visibility to 1. Baro-VNAV and VDP NA when using Fort Lauderdale/Hollywood Intl altimeter setting. DME/DME RNP-0.3 NA.

MALSR



**MISSED APPROACH:**  
Climb to 2000 direct  
FORSU and hold.

|                |                              |                                |                   |
|----------------|------------------------------|--------------------------------|-------------------|
| ATIS<br>119.85 | MIAMI APP CON<br>119.7 306.3 | EXECUTIVE TOWER<br>120.9 239.3 | GND CON<br>121.75 |
|----------------|------------------------------|--------------------------------|-------------------|

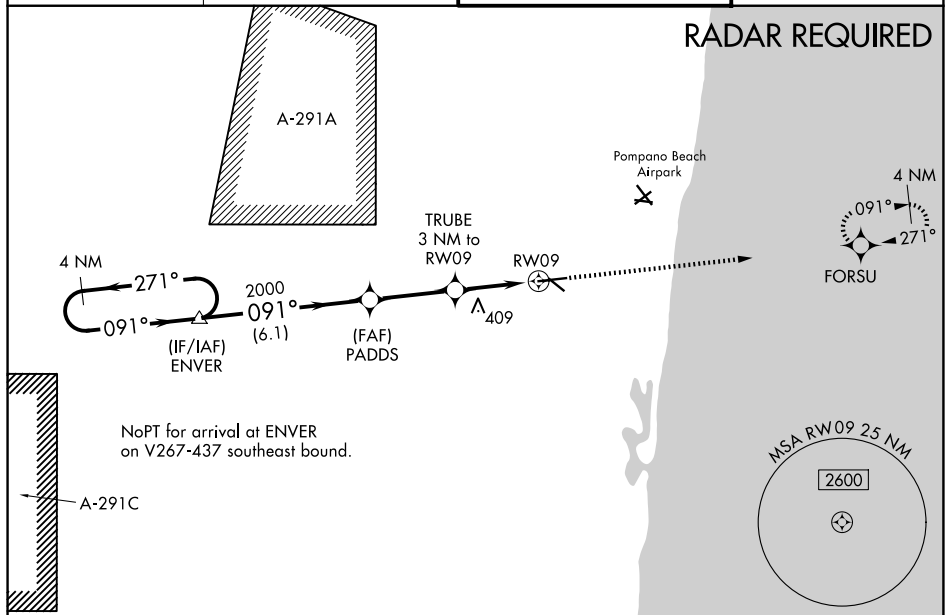

|         |  |         |
|---------|--|---------|
| ELEV 13 |  | TDZE 13 |
|---------|--|---------|

