

VENICE, FLORIDA

AL-5960 (FAA)

26078

WAAS CH 53433 W23A	APP CRS 230°	Rwy Ldg 4377 TDZE 18 Apt Elev 18
--	------------------------	---

RNAV (GPS) RWY 23


VENICE MUNI (VNC)

T When local altimeter setting not received, use Sarasota altimeter setting and increase all MDA 60 feet and increase LP and LNAV Cats C, D visibility $\frac{1}{8}$ mile, and Circling Cat C visibility $\frac{1}{4}$ mile.

A DME/DME RNP-0.3 NA. VDP NA with Sarasota altimeter setting. Helicopter visibility reduction below $\frac{3}{4}$ SM NA.

MISSED APPROACH:
Climb to 2900 direct
WUPOS and hold.

AWOS-3 119.275	TAMPA APP CON 119.65 353.575	UNICOM 122.725 (CTAF) 0
--------------------------	--	-----------------------------------

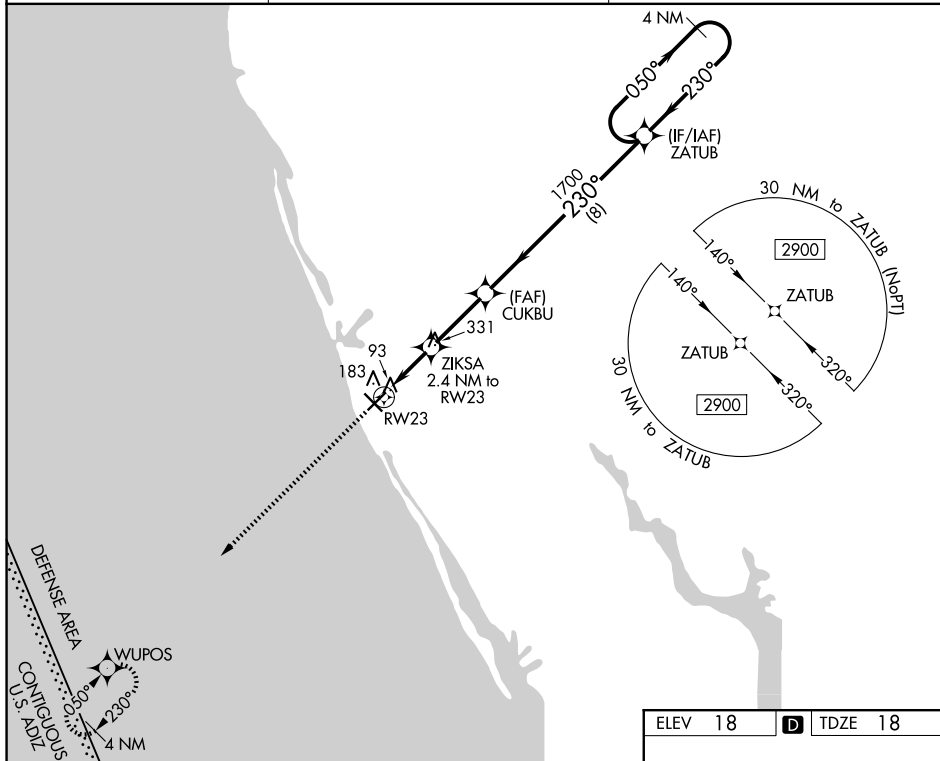

2900 ↑	WUPOS ✦	4 NM Holding Pattern			
CATEGORY	A	B	C	D	
LP MDA	360-1 342 (400-1)				
LNNAV MDA	440-1	422 (500-1)	440-1¼	422 (500-1¼)	
CIRCLING	500-1	482 (500-1)	700-2 682 (700-2)	920-3 902 (1000-3)	

ELEV 18

TDZE 18

230°

5-23

5440 X 150

13-31

5050 X 150

5

23

13

31

MIRA Rwy 5-23 and 13-31

REIL Rwy 5, 13 and 23

REIL Rwy 31

VENICE, FLORIDA
Orig-B 16OCT14

27°04'N-82°26'W

VENICE MUNI (VNC)

RNAV (GPS) RWY 23

SE-3, 06 AUG 2026 to 03 SEP 2026