

LOC/DME I-HDN

109.9

Chan 36

APP CRS

104°

Rwy Ldg TDZE

6591

Apt Elev

6606

ILS or LOC RWY 10

YAMPA VALLEY (HDN)

DME required.

NA

Inop table does not apply to S-ILS 10* all Cats and S-LOC 10 Cats C/D. For inop ALS, increase S-ILS 10 all Cats visibility to 2½ SM.

MALSF

MISSED APPROACH: Climb to 8000 then climbing right turn to 13300 on heading 130° and on CHE VOR/DME R-114 to TILLI/CHE 27.9 DME and hold, continue climb-in-hold to 13300.

*Missed approach requires minimum climb of 307 feet per NM to 8700.

AWOS-3PT


119.275

DENVER CENTER

120.475 235.975

UNICOM

123.0 (CTAF)

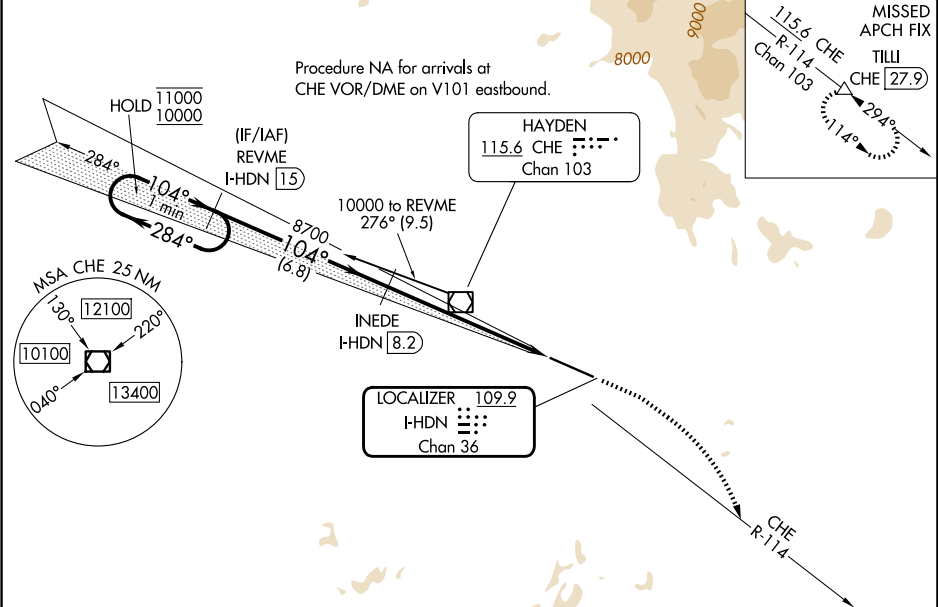

					ELEV 6606	D	TDZE 6591	
One Minute Holding Pattern REVME I-HDN 1.5 11000 ← 284° 10000 → 104° GS 3.00° TCH 55 8700 8700 6.8 NM 3 NM 3.5 NM 8000 13300 hdg 130° CHE R-114 TILLI △ I-HDN 5.2 I-HDN 1.7					104° 10000 X 130 0.3% DOWN REIL Rwy 28 HIRL Rwy 10-28			
CATEGORY	A		B		C		D	
S-ILS 10*	6791-¾ 200 (200-¾)							
S-ILS 10	7414-2 823 (900-2)							
S-LOC 10	7760-1 1169 (1200-1)		7760-1¼ 1169 (1200-1¼)		7760-3 1169 (1200-3)			
CIRCLING	7760-1¼ 1154 (1200-1¼)		7760-1½ 1154 (1200-1½)		7900-3 1294 (1300-3)		8200-3 1594 (1600-3)	